arXiv:1203.3659v2 [cs.IT] 18 Apr 2012

Cognitive Wyner Networks with Clustered Decoding

Amos Lapidoth, Nathan Levy, Shlomo Shamai (Shitz), and Michèle Wigger

***Abstract*—We study the uplink of linear cellular models featuring short range inter-cell interference. This means, we study K-transmitter/K-receiver interference networks where the transmitters lie on a line and the receivers on a parallel line; each receiver opposite its corresponding transmitter. We assume short-range interference by which we mean that the signal sent by a given transmitter is only interfered either by the signal sent by its left neighbor (we refer to this setup as the asymmetric network) or by the signals sent by both its neighbors (we refer to this setup as the symmetric network). We assume that each transmitter has side-information consisting of the messages of the t_ℓ transmitters to its left and the t_r transmitters to its right, and that each receiver can decode its message using the signals received at its own antenna, at the r_ℓ receiving antennas to its left, and at the r_r receiving antennas to its right. We provide upper and lower bounds on the multiplexing gain of these networks, i.e., on the asymptotic logarithmic growth of the sum-capacity at high-SNR. For certain setups our upper and lower bounds coincide: for example for the asymmetric network.**

Our results exhibit an equivalence between the transmitter side-information parameters t_ℓ and t_r and the receiver side-information parameters r_ℓ and r_r, and an equivalence between the left side-information parameters t_ℓ and r_ℓ and the right side-information parameters t_r and r_r. This holds also for the asymmetric network.

I. INTRODUCTION

We consider a large cellular mobile communication system where K cells are positioned on a linear array, and study the uplink of this system, i.e., the communication from the mobiles to the corresponding base stations in the cells. We assume short-range interference where the signal sent by the mobiles in a cell interfere only with the signals sent in the left adjacent cell and/or the right adjacent cell, depending on the position of the mobile within the cell. Our goal is to determine the throughput of such a cellular system at high signal-to-noise ratio (SNR). The high-SNR throughput of such a system does not depend on the number of mobiles in a cell (as long as this number is not 0), because in each cell there is only one base station. Therefore, we restrict attention to setups with only one mobile per cell. We particularly focus on two regular setups. The first setup exhibits *asymmetric interference*: each mobile is located at the right boarder of its cell, and thus its signal interferes only with the signal sent in the cell to its right but not to its left. The second setup exhibits *symmetric interference*: each mobile lies in the center of its cell, and thus its signal interferes with the signals in the adjacent cells to its right and its left. The symmetric setup was introduced in [1], [2].

On a more abstract level, our communication scenario is described as follows: K transmitters wish to communicate independent messages to their K corresponding receivers, and it is assumed that these communications interfere. Moreover, the K transmitters are assumed to be located on a horizontal line, and the K receivers are assumed to lie on a parallel line, each receiver opposite its corresponding transmitter. We consider two specific networks. In the *asymmetric network*, each receiver observes a linear combination of the signals transmitted by its corresponding transmitter, the signal of the transmitter to its left, and additive white Gaussian noise (AWGN). See Figure 1. In the *symmetric network*, each receiver observes a linear combination of the signal transmitted by its corresponding transmitter, the two signals of the transmitter to its left and the transmitter to its right, and AWGN. See Figure 2. The symmetric network is also known as Wyner's linear model or the full Wyner model; the asymmetric network is known as the asymmetric Wyner model or the soft hand-off model.

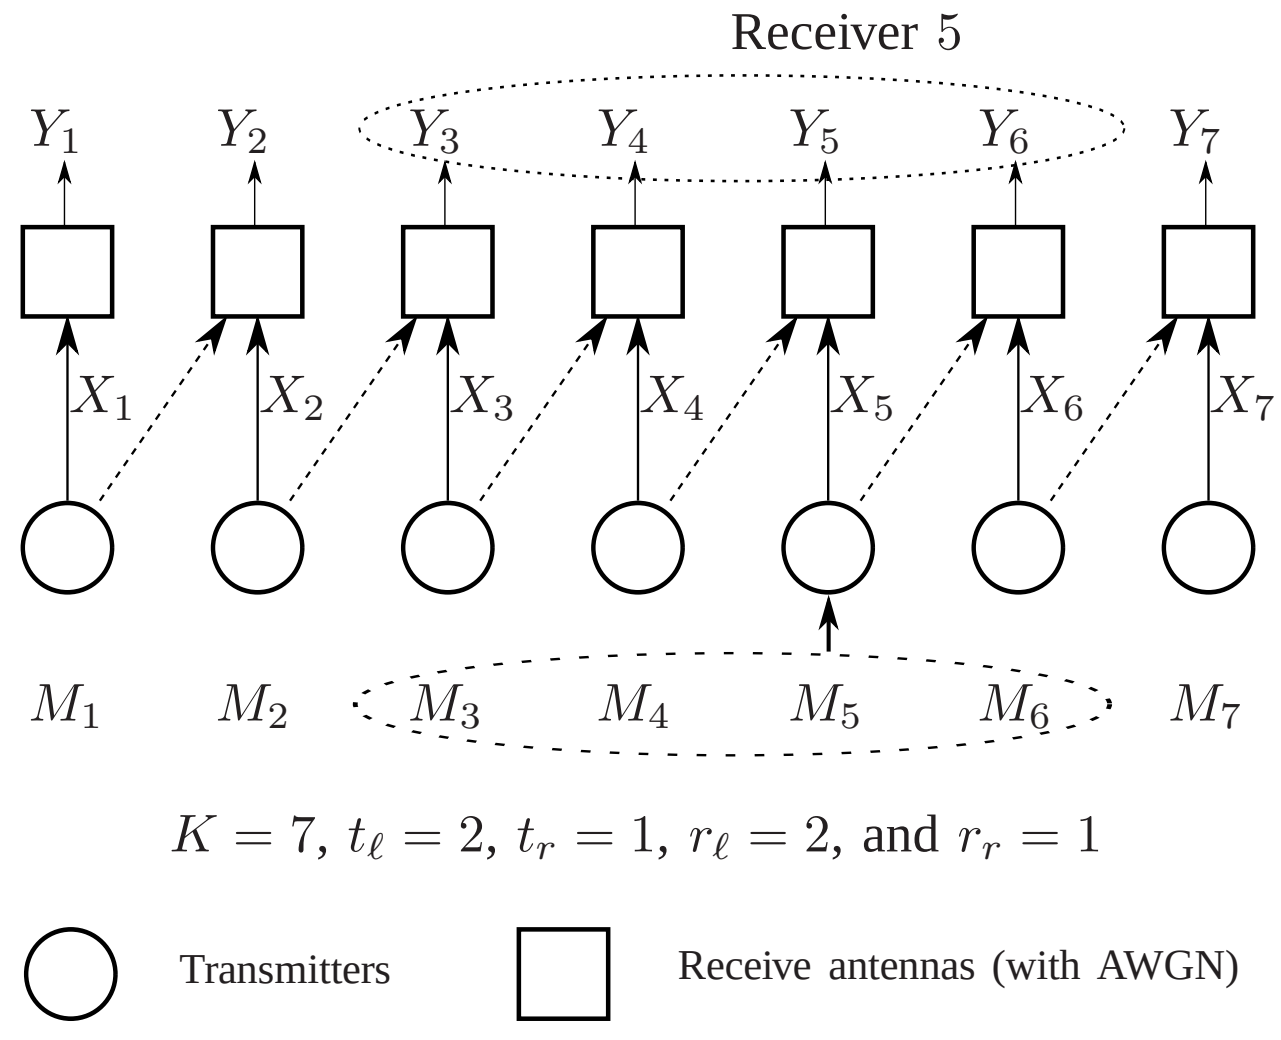

Fig. 1. Asymmetric network

In [1], [2] the receivers were allowed to *fully* cooperate in their decoding, and thus the communication scenario was modeled as a multiple-access channel (MAC). In contrast,

---

This paper was in part presented at the *International Symposium on Information Theory 2009*, in Seoul, Korea, July 2009.

A. Lapidoth is with the Department of Information Technology and Electrical Engineering at ETH Zurich, Switzerland {email: lapidoth@isi.ee.ethz.ch}. N. Levy was with the Department of Electrical Engineering at the Technion—Israel Institute of Technology {email: nhlevy@gmail.com}. S. Shamai is with the Department of Electrical Engineering at the Technion—Israel Institute of Technology {email: sshlomo@ee.technion.ac.il}. M. Wigger was with the Department of Information Technology and Electrical Engineering at ETH Zurich, Switzerland. She is now with the Communications and Electronics Department, at Telecom ParisTech, France {email: michele.wigger@telecom-paristech.fr}.

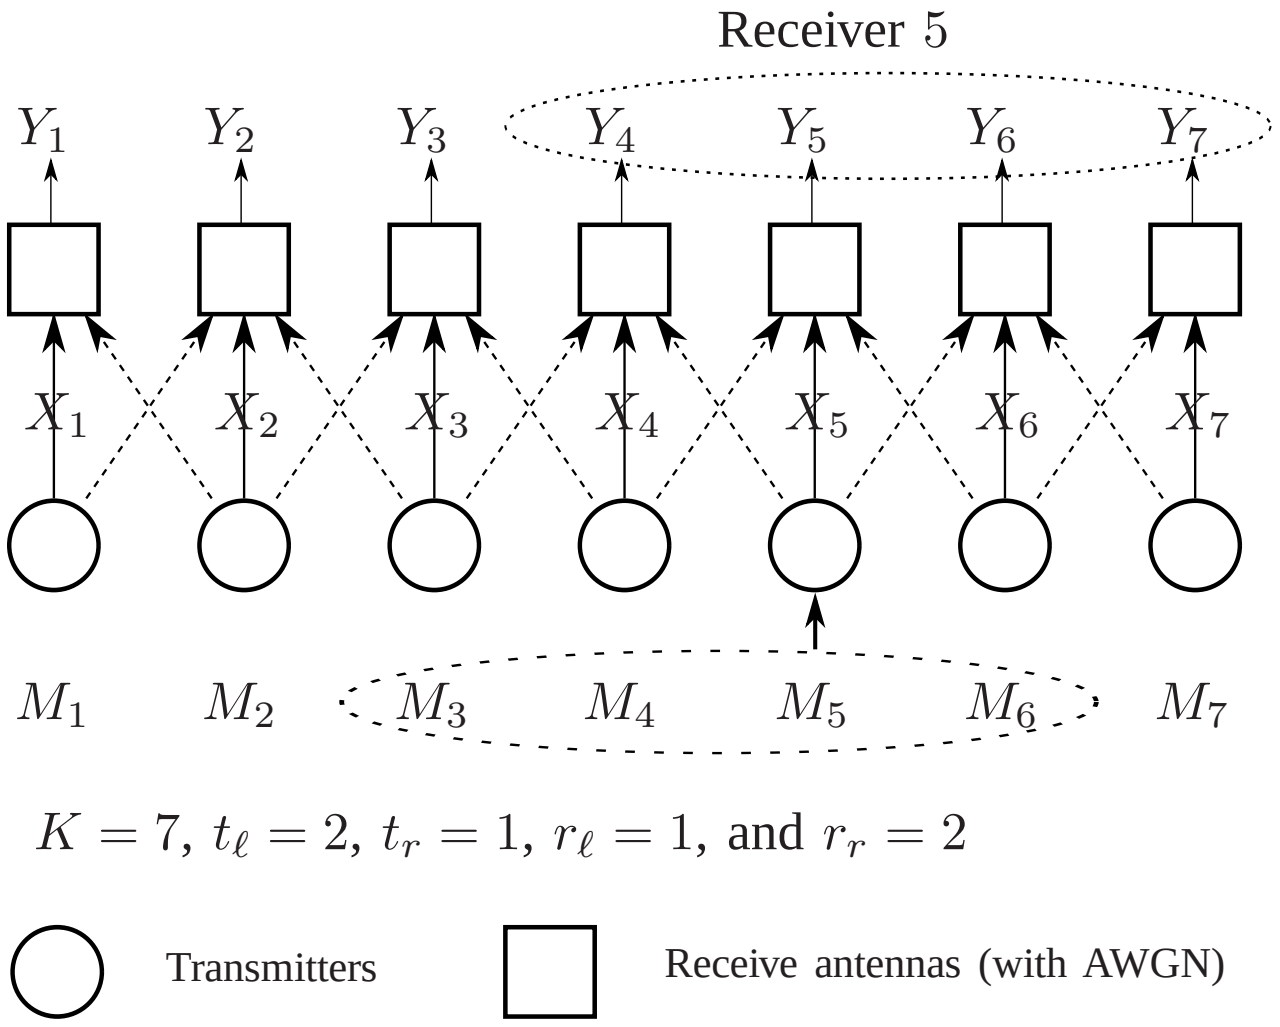
Receiver 5
Y_1 Y_2 Y_3 Y_4 Y_5 Y_6 Y_7
X_1 X_2 X_3 X_4 X_5 X_6 X_7
M_1 M_2 M_3 M_4 M_5 M_6 M_7
$K = 7$, $t_\ell = 2$, $t_r = 1$, $r_\ell = 1$, and $r_r = 2$
Transmitters
Receive antennas (with AWGN)

Fig. 2. Symmetric network

here we assume that each receiver has to decode its message individually, and therefore our communication scenario is modeled as an interference network. However, we still allow for *partial* cooperation between neighboring receivers as encountered in the uplink of cellular mobile systems where the neighboring basestations—because they can communicate over a backhaul—can cooperate in the form of *clustered local decoding*. That means, each receiver beside its own antenna has access also to the antennas of some of the receivers to its left and to its right.

Similarly, we also want to allow for (partial) cooperation between the transmitters in the form of *message cognition*. That means, that each transmitter besides its own message is cognizant also of the messages of some transmitters to its left and to its right. Such a scenario could be envisioned in the uplink of cellular mobile systems where the mobiles can communicate over bluetooth connections before communicating to their corresponding base stations.

Notice that the described model represents a combination of the models in [3] and [4]. Also, clustered local processing is in a way a compromise between the joint (multi-cell) decoding in [1], [2] and the single (single-cell) decoding in [5], [3]. (See also [13], [15], [16], [17] for related scenarios.) More general interference networks with transmitter cooperation have been studied, e.g., in [8], [18], [19], [20], [21].

Our focus in this paper is on the high-SNR asymptotes of the sum-capacities of these networks. Formally, we present our results in terms of the multiplexing gain or the asymptotic multiplexing gain per user; the asymptotic multiplexing gain per user is defined as the multiplexing gain of a network divided by the number of transmitter/receiver pairs K in the asymptotic regime of large K. We present lower and upper bounds on the multiplexing gain and the asymptotic multiplexing gain per user for the two networks.

For the asymmetric network our upper and lower bounds coincide, and thus yield the exact multiplexing gain and asymptotic multiplexing gain per user. The results exhibit an equivalence between cooperation at the transmitters and cooperation at the receivers. Moreover, the asymptotic multiplexing gain per user also exhibits an equivalence between the transmitters' information about their right-neighbors' messages and their information about their left-neighbors' messages. Similarly, they also exhibit, an equivalence between the receivers' information about the signals observed at their right-neighbors' antennas and their information about the signals observed at their left-neighbors' antennas. This result surprises in view of the asymmetry of the network.

For the symmetric network our upper and lower bounds coincide only in some special cases. In these special cases the multiplexing gain—and thus also the asymptotic multiplexing gain per user—again exhibits an equivalence between cooperation at the transmitters and cooperation at the receivers.

Our lower bounds are achieved by strategies that silence some of the transmitters and thereby split the network into non-interfering subnetworks that can be treated separately. Depending on the considered setup, a different scheme is then used for the transmission in the subnetworks. In some of the schemes part of the messages is transmitted using an interference cancellation scheme and the other part is transmitted using Costa's dirty-paper coding. (Costa's dirty paper coding can also be replaced by a simple precoding scheme as e.g., in [8], see also [6], [7], [14], [21].) In the other schemes the messages are transmitted using one of the following elementary bricks of multi-user information theory depending on the available side-information: an optimal multi-input/multi-output (MIMO) scheme, an optimal MIMO multi-access scheme, or an optimal MIMO broadcast scheme.

Our upper bounds are derived with a technique based on the idea of extending Sato's multi-access channel (MAC) bound [9] to more general interference networks with cognitive transmitters and multi-antenna receivers having side-information (see also [10], [3], [8]). In our technique this extended MAC bound is preceded by the following two steps. We first partition the K receivers into groups A and B, and within each group we allow the receivers to cooperate. Then, we let a genie reveal specific linear combinations of the noise sequences to the receivers in Group A. These linear combinations are such that whenever the receivers in Group A have decoded their intended messages correctly, jointly they can reconstruct the outputs observed at the receivers in Group B. Obviously, letting some of the receivers cooperate and revealing them genie-information can only increase the capacity region, and thus the multiplexing gain. For the resulting network (with K cognitive transmitters and 2 multi-antenna receivers having genie-information) we then apply the extended MAC bound. That means, we show that the capacity region of the resulting network is included in the capacity region of a MAC network consisting of the K transmitters and the single genie-aided multi-antenna receiver formed by the union of Group A receivers which is required to decode all messages $M_1, \ldots, M_K$, i.e., also the messages intended to the receivers in Group B. The upper bound is then concluded by upper bounding the multiplexing gain of this MAC network.

The discussed technique is too weak to derive two of our upper bounds. However, the following slight modification of the technique suffices to derive the desired bounds. Instead of choosing the genie-information in a way that when the receivers in Group A can decode their intended messages correctly, then they can jointly reconstruct the outputs observed at the receivers in Group B, we choose the genie-information in a way that when *all the receivers* can decode their messages correctly, then the receivers in Group A can perfectly reconstruct the outputs observed at the receivers in Group B from their decoded messages, from the genie-information, and from their observed signals. Clearly, this new condition on the genie-information is weaker than the original condition. However, as we show, the condition is sufficient for the extended MAC bound to apply.

We conclude this section with notation and an outline of the paper. Throughout the paper $\log(\cdot)$ denotes the natural logarithm, and the $\mod$-operator denotes the rest in the Euclidean division. Random variables are denoted by upper case letters, their realizations by lower case letters. Vectors are denoted by bold letters: random vectors by upper case bold letters and deterministic vectors by lower case bold letters. Given a sequence of random variables $X_1, \ldots, X_n$ we denote by X^n the tuple $(X_1, \ldots, X_n)$ and by $\boldsymbol{X}$ the n-dimensional column-vector $(X_1, \ldots, X_n)^\mathsf{T}$.

The paper is organized as follows. In Section II we describe the channel model and the results for the asymmetric network; in Section III the channel model and the results for the symmetric network. In the rest of the paper we prove our presented results: in Section IV the results for the asymmetric network; in Section V the achievability results for the symmetric network with symmetric side-information; in Section VI the achievability results for the symmetric network with general side-information; and finally in Section VII the converse results for the symmetric network with general side-information parameters.

II. ASYMMETRIC NETWORK

A. Description of the Problem

We consider a communication scenario with K transmitter/receiver pairs that are labeled from $\{1, \ldots, K\}$. The goal of the communication is that, for each $k \in \{1, \ldots, K\}$, Transmitter k conveys Message M_k to Receiver k. The messages $\{M_k\}_{j=1}^K$ are assumed to be independent with M_k being uniformly distributed over the set $\mathcal{M}_k \triangleq \{1, \ldots, \lfloor e^{nR_k} \rfloor\}$, where n denotes the block-length of transmission and R_k the rate of transmission of Message M_k.

In our setup, all the transmitters and the receivers are equipped with a single antenna and the channels are discrete-time and real-valued. Denoting the time-t channel input at Transmitter $k \in \{1, \ldots, K\}$ by $x_{k,t}$, the time-t channel output at Receiver k's antenna can be expressed as:

$$Y_{k,t} = x_{k,t} + \alpha_k x_{k-1,t} + N_{k,t}, \quad k \in \{1, \ldots, K\}; \qquad (1)$$

where for each $k \in \{1, \ldots, K\}$ the noise sequence $\{N_{k,t}\}$ is an independent sequence of independent and identically distributed (i.i.d.) standard Gaussians; where the cross-gain α_k is some given non-zero real number; and where to simplify notation we defined $x_{0,t}$ to be deterministically 0 for all times t. Thus, the communication of the k-th transmitter/receiver pair is interfered only by the communication of the transmitter/receiver pair to its left; see Figure 1.

It is assumed that each transmitter besides its own message is also cognizant of the $t_\ell \geq 0$ previous messages and the $t_r \geq 0$ following messages. That means, for each $k \in \{1, \ldots, K\}$, Transmitter k knows messages $M_{k-t_\ell}, \ldots, M_k, \ldots, M_{k+t_r}$, where $M_{-t_\ell+1}, \ldots, M_0$ and $M_{K+1}, \ldots, M_{K+t_r}$ are defined to be deterministically zero. Thus, Transmitter k can produce its sequence of channel inputs X_k^n as

$$X_k^n = f_k^{(n)}(M_{k-t_\ell}, \ldots, M_k, \ldots, M_{k+t_r}), \qquad (2)$$

for some encoding function

$$f_k^{(n)} \colon \mathcal{M}_{k-t_\ell} \times \cdots \times \mathcal{M}_k \times \cdots \times \mathcal{M}_{k+t_r} \to \mathbb{R}^n. \qquad (3)$$

The channel input sequences are subject to symmetric average block-power constraints, i.e., with probability 1 they have to satisfy

$$\frac{1}{n} \sum_{t=1}^{n} X_{k,t}^2 \leq P, \quad k \in \{1, \ldots, K\}. \qquad (4)$$

Each receiver observes the signals received at its own antenna, at the $r_\ell \geq 0$ antennas to its left, and at the $r_r \geq 0$ antennas to its right. Receiver k, for $k \in \{1, \ldots, K\}$, can thus produce its guess of Message M_k based on the output sequences $Y_{k-r_\ell}^n, \ldots, Y_{k+r_r}^n$, i.e., as

$$\hat{M}_k \triangleq \varphi_k^n(Y_{k-r_\ell}, \ldots, Y_{k+r_r}^n), \qquad (5)$$

for some decoding function

$$\varphi_k^{(n)} \colon \mathbb{R}^{n(r_\ell + r_t + 1)} \to \mathcal{M}_k, \qquad (6)$$

where $Y_{-r_\ell+1}^n, \ldots, Y_0^n$ and $Y_{K+1}^n, \ldots, Y_{K+r_r}^n$ are assumed to be deterministically 0.

The parameters $t_\ell, t_r, r_\ell, r_r \geq 0$ are given positive integers. We call t_ℓ and t_ℓ the *transmitter side-information parameters* and r_ℓ and r_r the *receiver side-information parameters*. Similarly, we call t_ℓ and r_ℓ the *left side-information parameters* and t_r and r_r the *right-side-information parameters*.

For the described setup we say that a rate-tuple $(R_1, \ldots, R_K)$ is achievable if, as the block-length n tends to infinity, the average probability of error decays to 0, i.e.,

$$\lim_{n \to 0} \Pr\left[(M_1, \ldots, M_K) \neq (\hat{M}_1, \ldots, \hat{M}_K) \right] = 0.$$

The closure of the set of all rate-tuples $(R_1, \ldots, R_K)$ that are achievable is called the capacity region, which we denote by $\mathcal{C}^{\text{Asym}}$. To make the dependence on the number of transmitter/receiver pairs K, the side-information parameters t_ℓ, t_r, r_ℓ, r_r, and the power P explicit, we mostly write $\mathcal{C}^{\text{Asym}}(K, t_\ell, t_r, r_\ell, r_r; P)$. The sum-capacity is defined as the supremum of the sum-rate $\sum_{k=1}^{K} R_k$ over all achievable tuples $(R_1, \ldots, R_K)$ and is denoted by $\mathcal{C}_{\Sigma}^{\text{Asym}}(K, t_\ell, t_r, r_\ell, r_r; P)$. Our main focus in this work is on the high-SNR asymptote of the sum-capacity which is characterized by the *multiplexing gain*:[1]

$$\mathcal{S}^{\text{Asym}}(K, t_\ell, t_r, r_\ell, r_r) \triangleq \overline{\lim_{P\to\infty}} \frac{\mathcal{C}_{\Sigma}^{\text{Asym}}(K, t_\ell, t_r, r_\ell, r_r; P)}{\frac{1}{2}\log(P)}.$$

B. Results

Theorem 1. *The multiplexing gain of the asymmetric model is*

$$\mathcal{S}^{\text{Asym}}(K, t_\ell, t_r, r_\ell, r_r) = K - \left\lceil \frac{K - t_\ell - r_\ell - 1}{t_\ell + t_r + r_\ell + r_r + 2} \right\rceil. \quad (7)$$

Proof: See Section IV-A for the achievability proof and Section IV-B for the converse. ■

Specializing Theorem 1 to the case $r_\ell = r_r = 0$ where each receiver has access only to its own receiving antenna, recovers the result in [3].

Remark 1. *Notice that Expression* (7) *depends only on the sum of the left side-information parameters t_ℓ and r_ℓ and on the sum of the right side-information parameters t_r and r_r. This shows an equivalence between cognition of messages at the transmitters and clustered local decoding at the receivers.*

Notice however that the left side-information parameters r_ℓ and t_ℓ do not play the same role as the right side-information parameters t_r and r_r. In fact, left side-information can be more valuable (in terms of increasing the multiplexing gain) than right side-information.

The difference in the roles of left and right side-information is only a boundary effect and vanishes when $K \to \infty$, see Corollary 1 and Remark 2.

As a corollary to Theorem 1 we can derive the *asymptotic multiplexing gain per-user*.

Corollary 1. *The asymptotic multiplexing gain per-user of the asymmetric network is given by*

$$\mathcal{S}_{\infty}^{\text{Asym}}(t_\ell, t_r, r_\ell, r_r) = \frac{t_\ell + t_r + r_\ell + r_r + 1}{t_\ell + t_r + r_\ell + r_r + 2}. \quad (8)$$

Remark 2. *The asymptotic multiplexing gain per-user in* (8) *depends on the parameters t_ℓ, t_r, r_ℓ, and r_r only through their sum. Thus, in the considered setup the asymptotic multiplexing gain per-user only depends on the total amount of side-information at the transmitters and receivers and not on how the side-information is distributed. In particular, cognition of messages at the transmitters and clustered local decoding at the receivers are equally valuable, and—despite the asymmetry of the interference network—also left and right side-information are equally valuable.*

III. SYMMETRIC NETWORK

A. Description of the Problem

The symmetric network is defined in the same way as the asymmetric network in Section II, except that the channel law (1) is replaced by

$$Y_{k,t} = \alpha_{k,\ell} X_{k-1,t} + X_{k,t} + \alpha_{k,r} X_{k+1,t} + N_{k,t}, \quad k \in \{1, \ldots, K\}. \quad (9)$$

As for the asymmetric network, for each $k \in \{1, \ldots, K\}$ the symbol $X_{k,t}$ denotes Transmitter k's channel input at time t; the symbols $X_{0,t}$ and $X_{K+1,t}$ are deterministically zero; the cross-gains $\{\alpha_{k,\ell}, \alpha_{k,r}\}$ are given non-zero real numbers; and $\{N_{k,t}\}_{\substack{1\le k\le K\\1\le t\le n}}$ are i.i.d. standard Gaussians. Thus, here, we assume for simplicity that all the cross-gains are equal to α. This motivates the following definition of a channel matrix.

Definition 1. *For every positive integer $p \geq 1$ and real number α we define $\mathsf{H}_p(\alpha)$ to be the $p \times p$ matrix with diagonal elements all equal to 1, elements above and below the diagonal equal to α, and all other elements equal to 0.*

The message cognition at the transmitters and the clustered local decoding at the receivers are modeled as for the asymmetric network. That means, the message cognition is described by the nonnegative integers t_ℓ and t_r and the encoding rules in (2), and the clustered decoding is described by the nonnegative integers r_ℓ and r_r and the decoding rules in (5).

The channel input sequences have to satisfy the power constraints (4).

Achievable rates, channel capacity, sum-capacity, multiplexing-gain, and the asymptotic multiplexing gain per-user are defined analogously to Section II. For this symmetric model and for a given positive integer $K > 0$, nonnegative integers $t_\ell, t_r, r_\ell, r_r \geq 0$, and power $P > 0$ the capacity region is denoted by $\mathcal{C}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r; P)$, the sum-capacity by $\mathcal{C}_{\Sigma}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r; P)$, the multiplexing gain by $\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r)$, and the asymptotic multiplexing gain per-user by $\mathcal{S}_{\infty}^{\text{Sym}}(t_\ell, t_r, r_\ell, r_r)$.

B. Results

We first present our results for *symmetric side-information* where

$$t_\ell + r_\ell = t_r + r_r, \quad (10)$$

followed by our results for general side-information parameters $r_\ell, t_\ell, r_r, t_r \geq 0$. We treat the special case with symmetric side-information separately, because for this case we have stronger results than for general side-information.

1) Symmetric Side-Information:

Throughout this subsection we assume that the parameters t_ℓ, t_r, r_ℓ, r_r satisfy (10).

Theorem 2 (Symmetric Side-Information)**.** *Depending on the value of α and the parameters $K, t_\ell, t_r, r_\ell, r_r$, the multiplexing gain satisfies the following conditions.*

---

[1] The multiplexing gain is also referred to as the “high-SNR slope", “pre-log", or “degrees of freedom"

1) *If* $K \leq t_\ell + r_\ell + 1$*:*
$$\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) = K - \delta_1, \tag{11}$$
where δ_1 *equals 1, if* $\det(\mathsf{H}_K(\alpha)) = 0$ *and 0 otherwise.*

2) *If* $K > t_\ell + r_\ell + 2$ *and* $\det(\mathsf{H}_{t_\ell + r_\ell + 1}(\alpha)) \neq 0$*:*
$$K - \left\lfloor \frac{K}{t_\ell + r_\ell + 2} \right\rfloor - 1 \leq \mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \leq K - \left\lfloor \frac{K}{t_\ell + r_\ell + 2} \right\rfloor. \tag{12}$$

3) *If* $K > t_\ell + r_\ell + 2$*;* $\det(\mathsf{H}_{t_\ell + r_\ell + 1}(\alpha)) \neq 0$*; and* $\det(\mathsf{H}_{t_\ell + r_\ell}(\alpha)) \neq 0$*, then*
$$\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) = K - \left\lfloor \frac{K}{t_\ell + r_\ell + 2} \right\rfloor. \tag{13}$$
(This third case is a special case of the second case. It is interesting because almost all values of α *lead to this case and because for this case we can improve the lower bound in* (12) *to meet the upper bound.)*

4) *If* $K > t_\ell + r_\ell + 2$ *and* $\det(\mathsf{H}_{t_\ell + r_\ell + 1}(\alpha)) = 0$*:*
$$K - \left\lfloor \frac{K}{t_\ell + r_\ell + 1} \right\rfloor \leq \mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \leq K - 2\left\lfloor \frac{K}{2(t_\ell + r_\ell) + 3} \right\rfloor - \delta_3, \tag{14}$$
where δ_3 *equals 1 if* $(K \mod (2(t_\ell + r_\ell) + 3)) > (t_\ell + r_\ell + 1)$ *and 0 otherwise.*

Proof: The achievability results are proved in Section V. The converse in (11) can be proved by first allowing all the transmitters to coopeate and all the receivers to cooperate, and then using the well-known expression for the capacity of the multi-antenna Gaussian point-to-point channel. The converse to (12) follows by specializing Upper bound (18) in Proposition 3 ahead to $t_\ell + r_\ell = t_r + r_r$. Similarly, the converse to (14) follows by specializing either (19) to $t_\ell + r_\ell = t_r + r_r$. ■

Remark 3. *We observe that the multiplexing gain only depends on the sum of the side-information parameters* $(t_\ell + r_\ell)$*. (Or equivalently on the sums* $(t_r + r_r)$ *or* $(t_\ell + t_r + r_\ell + r_r)$*.) Thus, we see that message cognition at the transmitters and clustered local decoding at the receivers are equivalent in terms of increasing the multiplexing gain.*

The following corollary is obtained from Theorem 2 by letting K tend to ∞.

Corollary 2. *If* $\det(\mathsf{H}_{t_\ell + r_\ell + 1}) \neq 0$*, then the asymptotic multiplexing gain per-user is given by*
$$\mathcal{S}_\infty^{\text{Sym}}(t_\ell, t_r, r_\ell, r_r) = \frac{t_\ell + r_\ell + 1}{t_\ell + r_\ell + 2}.$$
Otherwise, it is smaller and satisfies
$$\frac{t_\ell + r_\ell}{t_\ell + r_\ell + 1} \leq \mathcal{S}_\infty^{\text{Sym}}(t_\ell, t_r, r_\ell, r_r) \leq \frac{t_\ell + r_\ell + \frac{1}{2}}{t_\ell + r_\ell + \frac{3}{2}}.$$

Remark 4. *When* $\det(\mathsf{H}_{t_\ell + r_\ell + 1}) \neq 0$*, then to obtain the same asymptotic multiplexing-gain per-user in this symmetric network as in the asymmetric network before, we need double the "amount" of side-information* $t_\ell + t_r + r_\ell + r_r$*.*

Remark 5. *From Theorem 2 we see that for certain (few) values of* $\alpha \neq 0$ *the asymptotic multiplexing gain per user drops.*

Example 1. *Consider a symmetric network with symmetric side-information* $r_\ell + t_\ell = r_r + t_r = 2$*. Let* K *be* 7*. Then, if* $\alpha \notin \{-\sqrt{2}/2, \sqrt{2}/2\}$*, by Theorem 2 the multiplexing gain is 6, and in contrast, if* $\alpha \in \{-\sqrt{2}/2, \sqrt{2}/2\}$ *the multiplexing gain is only 5.*

By Corollary 2 the asymptotic multiplexing gain per-user is $3/4$*, if* $\alpha \notin \{-\sqrt{2}/2, \sqrt{2}/2\}$*, but it is at most* $5/7$ *(which is smaller than* $3/4$*) if* $\alpha \in \{-\sqrt{2}/2, \sqrt{2}/2\}$*.*

Notice however, that even though the multiplexing gain is discontinuous at certain values of α, this does not imply that for fixed powers P also the sum-rate capacity of the network is discontinuous in α.

We conclude this section with a result on the *high-SNR power-offset* which is defined as
$$\mathcal{L}_\infty^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \triangleq \overline{\lim_{P \to \infty}} \left(\frac{\mathcal{S}^{\text{Sym}}}{2} \log(P) - \mathcal{C}_\Sigma^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r; P) \right).$$

Proposition 1 (Symmetric Side-Information)**.** *Assume (10). Let* α^* *be such that* $\det(\mathsf{H}_{r_\ell + t_\ell + 1}(\alpha^*)) = 0$*. Also, let* $K = q(r_\ell + t_\ell + 2) - 1$ *for some positive integer* q*. Then, there exist a function* c_0*, bounded in the neighborhood of* α_0 *such that for all* α *sufficiently close to* α^**:*
$$\mathcal{L}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \geq -\nu \log|\alpha - \alpha^*| + c_0(\alpha^*),$$
where ν *is the multiplicity of* α^* *as a root of* $\det(\mathsf{H}_{r_\ell + t_\ell + 1}(X))$

In other words, when α approaches the critical value α^*, the power offset goes to infinity.

Proof: See Appendix D. ■

2) *Results for General Parameters* $t_\ell, t_r, r_\ell, r_r \geq 0$*:*

Proposition 2. *The multiplexing gain of the symmetric network with general side-information parameters satisfies the following four lower bounds.*

1) *It is lower bounded by:*
$$\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \geq K - 2\left\lfloor \frac{K}{t_\ell + t_r + r_\ell + r_r} \right\rfloor - \theta_1; \tag{15}$$
where θ_1 *equals 0 if* $\kappa_1 \triangleq K \mod (t_\ell + t_r + r_\ell + r_r) = 0$*, it equals 1 if* $\kappa_1 = 1$*, and it equals 2 if* $\kappa_1 \geq 2$*.*

2) *Moreover, irrespective of the right side-information* t_r *and* r_r*:*
$$\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \geq K - 2\left\lfloor \frac{K}{t_\ell + r_\ell + 1} \right\rfloor - \theta_2. \tag{16}$$

where θ_2 equals 0 if $\kappa_2 \triangleq K \mod (t_\ell + r_\ell + 1) = 0$, it equals 1 if $\kappa_2 = 1$, and it equals 2 if $\kappa_2 \geq 2$.

3) *The lower bound* (16) *in 2) remains valid if on the right-hand side of* (16) *we replace the parameters t_ℓ and r_ℓ by t_r and r_r.*
4) *Finally, irrespective of the transmitter side-information t_ℓ and t_r:*

$$\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \geq K - 2\left\lfloor \frac{K}{r_\ell + r_t + 3} \right\rfloor - \theta_3; \tag{17}$$

where θ_3 equals 0 if $\kappa_3 \triangleq K \mod (t_\ell + r_\ell + 3)$ equals 0, it equals 1 if $\kappa_3 = 1$, and it equals 2 if $\kappa_3 \geq 2$.

Proof: See Section VI. ■

The lower bound in 2) is useful only when $t_r = r_r = 0$, the lower bound in 3) only when $t_\ell = t_r = 0$, and the bound in 4) only when $t_\ell + t_r \leq 2$.

Proposition 3. *The multiplexing gain is upper bounded by the following three upper bounds.*

1) *It is upper bounded by:*

$$\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \leq K - 2\left\lfloor \frac{K}{t_\ell + t_r + r_\ell + r_r + 4} \right\rfloor - \theta_4; \tag{18}$$

where θ_4 equals 1 if the rest of K divided by $(t_\ell + t_r + r_\ell + r_r + 4)$ is at least $\min\{t_\ell + r_\ell + 2, t_r + r_r + 2\}$, and θ_4 equals 0 otherwise.

2) *Moreover, if $\det\left(\mathsf{H}_{r_\ell + t_\ell + 1}\right)(\alpha) = 0$:*

$$\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r) \leq K - 2\left\lfloor \frac{K}{t_\ell + t_r + r_\ell + r_r + 3} \right\rfloor - \theta_5; \tag{19}$$

where θ_5 equals 1 if the rest of K divided by $(t_\ell + t_r + r_\ell + r_r + 3)$ is at least $r_r + t_r + 1$, and θ_5 equals 0 otherwise.

3) *The upper bound in 2) holds also if everywhere (except for $\mathcal{S}^{\text{Sym}}(K, t_\ell, t_r, r_\ell, r_r)$) one exchanges the subscripts ℓ and r.*

Proof: See Section VII. ■

From Propositions 2 and 3 we obtain the following corollary.

Corollary 3. *Irrespective of the parameter α, the asymptotic multiplexing gain per-user satisfies*

$$\begin{aligned}\max\left\{\frac{r_\ell + r_r + 1}{r_\ell + r_r + 3}, \frac{t_\ell + t_r + r_\ell + r_r - 2}{t_\ell + t_r + r_\ell + r_r}\right\} &\leq \mathcal{S}_\infty^{\text{Sym}}(t_\ell, t_r, r_\ell, r_r) \\ &\leq \frac{t_\ell + t_r + r_\ell + r_r + 2}{t_\ell + t_r + r_\ell + r_r + 4}.\end{aligned}$$

IV. PROOF OF THEOREM 1

A. Direct Part of Theorem 1

We derive a lower bound by giving an appropriate coding scheme based on silencing certain transmitters, on Costa's dirty-paper coding, and on successive interference cancellation. We silence γ transmitters, where

$$\gamma \triangleq \left\lceil \frac{K - t_\ell - r_\ell - 1}{t_\ell + t_r + r_\ell + r_r + 2} \right\rceil, \tag{20}$$

and let the remaining $(K - \gamma)$ transmitters send their messages at rates $\frac{1}{2}\log(1 + P)$ or $\frac{1}{2}\log(1 + \alpha^2 P)$. Such a scheme achieves the claimed multiplexing gain.

Before explaining which transmitters are silenced, we define

$$\beta \triangleq t_\ell + t_r + r_\ell + r_r + 2, \tag{21}$$

$$\kappa \triangleq (K \mod \beta). \tag{22}$$

We silence Transmitters $j\beta$, for $j \in \{1, \ldots, \lfloor K/\beta \rfloor\}$; moreover, if $q > (r_\ell + t_\ell + 1)$ we also silence Transmitter K. This splits the network into $\lceil K/\beta \rceil$ non-interfering subnets (subnetworks). The first $\lfloor K/\beta \rfloor$ subnets all have the same topology. They consist of $(t_\ell + t_r + r_\ell + r_r + 1)$ active transmitting antennas and $(t_\ell + t_r + r_\ell + r_r + 2)$ receiving antennas. We refer to these subnets as *generic* subnets. If K is not a multiple of β, there is an additional last subnet with

$$\begin{cases}\kappa \text{ active transmitting antennas,} & \text{if } \kappa \leq (t_\ell + r_\ell + 1), \\ (\kappa - 1) \text{ active transmitting antennas,} & \text{if } \kappa > (t_\ell + r_\ell + 1),\end{cases}$$

and with κ receiving antennas. We refer to such a subnet as a *reduced* subnet.

As we shall see, in our scheme each transmitter ignores its side-information about the messages pertaining to transmitters in other subnets. Likewise, each receiver ignores its side-information about the outputs of antennas belonging to subnets other than its own. Therefore, we can describe our scheme for each subnet separately.

We first describe our scheme for a generic subnet. For simplicity, we assume that the parameters $K, t_\ell, t_r, r_\ell, r_r$ are such that the first subnet is generic and describe the scheme for the first subnet. Moreover, we assume that $r_r > 0$. The case where $r_r = 0$ is treated later on.

In this case, in the first subnet, we wish to transmit Messages $M_1, \ldots, M_{t_\ell + t_r + r_\ell + r_r + 1}$. Define the sets (some of which may be empty)

$$\mathcal{G}_1 = \{1, \ldots, r_\ell + 1\}$$

$$\mathcal{G}_2 = \{r_\ell + 2, \ldots, r_\ell + t_\ell + 1\}$$

$$\mathcal{G}_3 = \{r_\ell + t_\ell + 2, \ldots, r_\ell + t_\ell + t_r + 1\}$$

$$\mathcal{G}_4 = \{r_\ell + t_\ell + t_r + 2, \ldots, r_\ell + t_\ell + t_r + r_r + 1\}$$

Messages $1, \ldots, r_\ell + 1$ are transmitted as follows.

- Transmitters $1, \ldots, r_\ell + 1$ ignore the interference and code for a Gaussian single-user channel. That is, for each $k \in \mathcal{G}_1$, Transmitter k encodes its message M_k using a Gaussian codebook of power P.[2]
- Receiver 1 decodes Message M_1 based on the interference-free outputs $\boldsymbol{Y}_1$.

---

[2] In order to satisfy the block-power constraints imposed on the input sequences, the power of these Gaussian codebooks should be chosen slightly smaller than P. However, this is a technicality which we ignore for readability.

If $r_\ell > 0$, Receiver 2 first decodes Message M_1 also based on $\boldsymbol{Y}_1$. Then, it reconstructs $\boldsymbol{X}_1$ (which is a function of M_1 only), and subtracts α times its reconstruction from the output sequence $\boldsymbol{Y}_2$. It finally decodes Message M_2 based on this difference. We refer to such a procedure as *successive interference cancellation*.

More generally, for each $k \in \mathcal{G}_1$, Receiver k uses successive interference cancellation to first decode Message M_1, followed by Message M_2, etc. up to Message M_k.

- Notice that, for each $k \in \mathcal{G}_1$, if the previous messages $M_1, \ldots, M_{k-1}$ were decoded correctly, then Message M_k can be decoded based on the interference-free signal $\boldsymbol{X}_k + \boldsymbol{N}_k$, where $\boldsymbol{N}_k \triangleq (N_{k,1}, \ldots, N_{k,n})$. Thus, in the proposed scheme, Messages $M_1, \ldots, M_{r_\ell+1}$ can be communicated with arbitrary small average probability of error at rates $R_1 = \ldots = R_{r_\ell+1} = \frac{1}{2}\log(1+P)$.

If $t_\ell \geq 1$, Messages $(r_\ell+2), \ldots, (r_\ell+t_\ell+1)$ are transmitted as follows.

- For each $k \in \mathcal{G}_2$, Transmitter k can use its side-information to compute the interference term $\alpha\boldsymbol{X}_{k-1}$. Indeed, as we shall see shortly, in our scheme the input sequence $\boldsymbol{X}_{k-1}$ depends only on messages $M_{r_\ell+1}, \ldots, M_{k-1}$, and these messages are known also to Transmitter k, because $(k-(r_\ell+1)) \leq t_\ell$ for all $k \in \mathcal{G}_2$.
- For each $k \in \mathcal{G}_2$, Transmitter k uses a dirty-paper code of power P and rate $R_k = \frac{1}{2}\log(1+P)$ to transmit its message M_k and mitigate the interference $\alpha\boldsymbol{X}_{k-1}$ experienced at the antenna of Receiver k.[3]
- For each $k \in \mathcal{G}_2$, Receiver k decodes Message M_k applying dirty-paper decoding based on the output sequence $\boldsymbol{Y}_k$.

If $t_r \geq 1$, Messages $(r_\ell+t_\ell+2), \ldots, (r_\ell+t_\ell+t_r+1)$ are transmitted as follows.

- For each $k \in \mathcal{G}_3$, Transmitter k can use its side-information to compute the signal sent by its right neighbor $\boldsymbol{X}_{k+1}$. Indeed, as we shall see shortly, in our scheme the transmitted sequence $\boldsymbol{X}_{k+1}$ depends only on messages $M_{k+1}, \ldots,$ $M_{r_\ell+t_\ell+t_r+2}$, and these messages are known to Transmitter k because $((r_\ell+t_\ell+t_r+2)-k) \leq t_r$, for all $k \in \mathcal{G}_3$.
- For each $k \in \mathcal{G}_3$, Transmitter k uses a dirty-paper code of power $\alpha^2 P$ and rate $R_k = \frac{1}{2}\log(1+\alpha^2 P)$ to encode its message M_k and mitigate the "interference" $\boldsymbol{X}_{k+1}$ experienced at the antenna of Receiver $(k+1)$. Denoting the resulting dirty-paper sequence by $\tilde{\boldsymbol{X}}_k$, Transmitter k sends the scaled sequence $\boldsymbol{X}_k = \frac{1}{\alpha}\tilde{\boldsymbol{X}}_k$ over the channel. The scaling reverses the amplification by α the sequence $\boldsymbol{X}_k$ experiences on its path to Receiver $(k+1)$.

  Since the sequence $\tilde{\boldsymbol{X}}_k$ is average block-power constrained to $(\alpha^2 P)$, the transmitted sequence $\boldsymbol{X}_k$ is average block-power constrained to P.
- Recall that by our assumption $r_\ell \geq 1$, for each $k \in \mathcal{G}_3$, Receiver k has access to the antenna of Receiver $(k+1)$. Therefore, Receiver k can use dirty-paper decoding to decode Message M_k based on the output sequence $\boldsymbol{Y}_{k+1} = \boldsymbol{X}_{k+1} + \alpha\boldsymbol{X}_k + \boldsymbol{N}_{k+1}$, which in our scheme is given by $\boldsymbol{X}_{k+1} + \tilde{\boldsymbol{X}}_k + \boldsymbol{N}_{k+1}$.

Messages $(r_\ell+t_\ell+t_r+2), \ldots, (r_\ell+t_\ell+t_r+r_r+1)$ are transmitted as follows.

- For each $k \in \mathcal{G}_4$, Transmitter k encodes its message M_k as for an interference-free, single-user channel using Gaussian codebooks of power P.
- For each $k \in \mathcal{G}_4$, Receiver k applies successive interference cancellation, but starting with the last output sequence $\boldsymbol{Y}_{r_\ell+t_\ell+t_r+r_r+2}$ and the last Message $M_{r_\ell+t_\ell+t_r+r_r+1}$.

  More precisely, Receiver $(r_\ell+t_\ell+t_r+r_r+1)$ decodes Message $M_{r_\ell+t_\ell+t_r+r_r+1}$ based on $\boldsymbol{Y}_{r_\ell+t_\ell+t_r+r_r+2}$. Notice that $\boldsymbol{Y}_{r_\ell+t_\ell+t_r+r_r+2} = \alpha\boldsymbol{X}_{r_\ell+t_\ell+t_r+r_r+1} + \boldsymbol{N}_{r_\ell+t_\ell+t_r+r_r+2}$, because we have silenced Transmitter $(r_\ell+t_\ell+t_r+r_r+2)$.

  If $r_r \geq 2$, Receiver $(r_\ell+t_\ell+t_r+r_r)$ first decodes Message $M_{t_\ell+t_r+r_\ell+r_r+1}$ based on the output sequence $\boldsymbol{Y}_{r_\ell+t_\ell+t_r+r_r+2}$, then it reconstructs $\boldsymbol{X}_{r_\ell+t_\ell+t_r+r_r+1}$, and subtracts it from $\boldsymbol{Y}_{r_\ell+t_\ell+t_r+r_r+1}$. Based on the resulting difference, it then decodes Message $M_{r_\ell+t_\ell+t_r+r_r}$.

  In general, for each $k \in \mathcal{G}_4$, Receiver k repeatedly applies the described successive interference cancellation procedure and decodes messages $M_{r_\ell+t_\ell+t_r+r_r+1}$, $M_{r_\ell+t_\ell+t_r+r_r}$, etc., up to M_k.
- For each $k \in \mathcal{G}_4$, if the previous messages $M_{r_\ell+t_\ell+t_r+r_r+1}, \ldots, M_{k+1}$ were decoded correctly, Message M_k can be decoded based on the interference-free, but attenuated, signal $\alpha\boldsymbol{X}_k + \boldsymbol{N}_{k+1}$. Therefore, for each $k \in \mathcal{G}_4$, Message M_k can be transmitted with arbitrary small average probability of error at a rate $\frac{1}{2}\log(1+\alpha^2 P)$.

This coding scheme achieves a multiplexing gain of $(t_\ell+t_r+r_\ell+r_r+1)$ over a generic subnet when $r_r > 0$.

We now treat the case when $r_r = 0$. The scheme is very similar to the case when $r_r > 0$, except for the following changes. We again assume that the first subnet is generic and focus on this first subnet. Instead of transmitting Messages $M_1, \ldots, M_{t_\ell+t_r+r_\ell+r_r+1}$ as in the case when $r_r = 0$, we now transmit Messages $M_1, \ldots, M_{r_\ell+t_\ell+1}$ and $M_{r_\ell+t_\ell+3}, \ldots, M_{t_\ell+t_r+r_\ell+2}$ over this first subnet. Messages $M_1, \ldots, M_{r_\ell+t_\ell+1}$ are transmitted as before. In contrast, Messages $M_{r_\ell+t_\ell+3}, \ldots, M_{t_\ell+t_r+r_\ell+2}$ are transmitted differently.

If $t_r > 0$, Messages $M_{r_\ell+t_\ell+3}, \ldots, M_{t_\ell+t_r+r_\ell+2}$ are transmitted as follows.

- For each $k \in \mathcal{G}_3$, Transmitter k can use its side-information to compute the interference term $\boldsymbol{X}_{k+1}$. Indeed, as seen shortly, in our scheme the input sequence $\boldsymbol{X}_{k+1}$ depends only on messages $M_{k+2}, \ldots, M_{r_\ell+t_\ell+t_r+2}$, and these messages are known also to Transmitter k, because $((r_\ell+t_\ell+t_r+1)-k) \leq t_r$ for all $k \in \mathcal{G}_3$.

---

[3] Alternatively, also the simpler *partial interference cancellation* scheme in [8] could be used instead of the dirty-paper coding.

- For each $k \in \mathcal{G}_3$, Transmitter k uses a dirty-paper code of power P and rate $R_{k+1} = \frac{1}{2}\log(1+\alpha^2 P)$ to transmit Message M_{k+1} and mitigate the "interference" $\boldsymbol{X}_{k+1}$ experienced at the antenna of Receiver $(k+1)$.
- For each $k \in \mathcal{G}_3$, Receiver $(k+1)$ decodes Message M_{k+1} applying dirty-paper decoding based on the output sequence $\boldsymbol{Y}_{k+1}$.

This scheme achieves a multiplexing gain $(t_\ell+t_r+r_\ell+r_r+1)$ over a generic subnet when $r_r = 0$. Combining the two schemes we conclude that we can always achieve a multiplexing gain $(t_\ell+t_r+r_\ell+r_r+1)$ over a generic subnet.

Remark 6. *Notice that generally the two schemes for generic subnets described above exploit the fact that the signal sent at the last transmitting antenna is observed interference-free at the last receiving antenna in the subnet. This stems from the fact that the subnet consists of one more receiving antenna than transmitting antenna. However, when the schemes are specialized to a setting without right side-information* $r_r = t_r = 0$, *then they coincide and they do not use the last receiving antenna in the subnet. Thus, our scheme can achieve a multiplexing gain of* $(t_\ell + r_\ell + 1)$ *on an isolated subnet with* $(r_\ell + t_\ell + 1)$ *transmit and receive antennas.*

We next describe our scheme for a reduced subnet. Recall that this subnet consists of κ active transmitting antennas and κ receiving antennas, if $\kappa \leq (t_\ell + r_\ell + 1)$, and of $\kappa - 1$ active transmitting antennas and κ receiving antennas, if $\kappa > (t_\ell + r_\ell + 1)$. Thus, if $\kappa > (t_\ell + r_\ell + 1)$, then we can use the same scheme over a reduced subnet as over the generic subnet, when instead of the original side-information parameters t_ℓ, t_r, r_ℓ, r_r, the following parameters $r'_\ell, t'_\ell, t'_r, r'_r$ are used:

$$r'_\ell \triangleq \min\left[(\kappa-1), r_\ell\right] \tag{23a}$$

$$t'_\ell \triangleq \min\left[(\kappa-r_\ell-1)_+, t_\ell\right] \tag{23b}$$

$$t'_r \triangleq \min\left[(\kappa-r_\ell-t_\ell-2)_+, t_r\right] \tag{23c}$$

$$r'_r \triangleq \min\left[(\kappa-r_\ell-t_\ell-t_r-2)_+, r_r\right], \tag{23d}$$

where $(x)_+$ is defined as $\max\{x, 0\}$. This scheme achieves a multiplexing gain of $\kappa - 1$ over the reduced subnet. By Remark 6 the same scheme also achieves a multiplexing gain of κ over the reduced subnet if $\kappa \leq (t_\ell + r_\ell + 1)$.

We can hence conclude that over the entire network our scheme achieves a multiplexing gain of $K - \gamma$, which proves the desired lower bound.

Remark 7. *In the described scheme a subset of* γ *messages is completely ignored and not sent over the network. The described scheme is, however, easily changed to a scheme achieving a multiplexing gain of at least* $K - \gamma - 1$ *and where all the messages are sent at positive and almost equal rates. The idea is to time-share* β *schemes that are similar to the scheme described above. In each of these schemes a different set of transmitters is silenced. In the* i*-th scheme,* $i \in \{1, \ldots, \beta\}$, *transmitters* $\{i + j\beta\}_{j \in \{1,\ldots,, \lfloor \frac{K-i}{\beta} \rfloor\}}$ *are silenced, and if* $(K \mod \beta) \geq (i+t_\ell+r_\ell+1)$, *then also the last transmitter* K *is silenced. This splits the network into* γ *or* $\gamma+1$ *subnets: a possibly reduced first subnet,* $\gamma-2$ *or* $\gamma-1$ *generic subnets, and a possibly reduced last subnet. In each of the subnets, depending on whether it is generic or reduced, one of the above described schemes is used for transmission.*

B. Converse to Theorem 1

If the parameter γ as defined in (20) equals 0, then the desired upper bound follows directly from the Maximum-Entropy Theorem [11]. We therefore restrict attention to setups where $K, t_\ell, t_r, r_\ell, r_r$ are such that $\gamma \geq 1$.

To prove our desired upper bound we introduce a *Cognitive MAC Network*, whose capacity region $\mathcal{C}_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r; P)$ satisfies

$$\mathcal{C}(K, t_\ell, t_r, r_\ell, r_r; P) \subseteq \mathcal{C}_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r; P), \tag{24}$$

and whose multiplexing gain $\mathcal{S}_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r)$ satisfies

$$\mathcal{S}_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r) \leq K - \gamma. \tag{25}$$

This obviously establishes the desired proof.

In the following we describe the construction of the Cognitive MAC Network (Subsections IV-B1–IV-B3) followed by a proof of the upper bounds (24) and (25) (Subsection IV-B4). The Cognitive MAC Network is obtained in three steps: The original network is first enhanced to a *Rx-Cooperative Network*, which is then further enhanced to a *Genie-Aided Network*, and this latter network is finally modified to a Cognitive MAC Network. These three construction steps are explained in the following Subsections IV-B1–IV-B3.

1) Rx-Cooperative Network: The Rx-Cooperative Network is defined as the original network described in Section II-A with the following enhancement. We partition the set of receivers into Group A and Group B, as described shortly, and let all receivers within a group cooperate. Group A is defined as the set of all Receivers k, for which k lies in $\mathcal{A} \triangleq \bigcup_{m=0}^{\gamma-1} \mathcal{A}_m$, where

$$\mathcal{A}_m \triangleq \begin{cases} \{(\gamma-1)\beta + r_\ell + 2, \ldots, K\} & m = \gamma - 1 \\ \{m\beta + r_\ell + 2, \ldots, (m+1)\beta - r_r\} & m < \gamma - 1, \end{cases}$$

and where recall that β is defined as $(t_\ell + t_r + r_\ell + r_r + 2)$. Group B consists of all other receivers, i.e., it includes each Receiver k, for which $k \in \mathcal{B} \triangleq (\{1, \ldots, K\} \setminus \mathcal{A})$.

Remark 8. *The set* $\mathcal{A}_{\gamma-1}$ *has at least* $(t_\ell + 1)$ *and at most* $(\beta + t_\ell)$ *elements.*

Remark 9. *The union of receivers in Group A observes all output sequences, except for output sequences* $\{\boldsymbol{Y}_{1+m\beta}\}_{m=0}^{\gamma-1}$.

2) Genie-Aided Network: The Genie-Aided Network is defined as the Rx-Cooperative Network with the following enhancement. It is assumed that a genie reveals to the receivers in Group A the sequences $\boldsymbol{V}_0, \ldots, \boldsymbol{V}_{\gamma-1}$, where

$$\boldsymbol{V}_0 \triangleq \boldsymbol{N}_1 + \sum_{\nu=1}^{t_\ell+r_\ell+1} \left(-\frac{1}{\alpha}\right)^{\nu} \boldsymbol{N}_{1+\nu},$$

and, for $m \in \{1, \ldots, \gamma-1\}$:

$$\boldsymbol{V}_m \triangleq \boldsymbol{N}_{1+m\beta} + \sum_{\nu=1}^{t_\ell+r_\ell+1} \left(-\frac{1}{\alpha}\right)^{\nu} \boldsymbol{N}_{1+m\beta+\nu} \\ + \sum_{\nu=1}^{t_r+r_r} (-\alpha)^{\nu} \boldsymbol{N}_{1+m\beta-\nu}.$$

Remark 10. *The genie information $\boldsymbol{V}_0, \ldots, \boldsymbol{V}_{\gamma-1}$ is such that, for given encoding functions $f_1^{(n)}, \ldots, f_K^{(n)}$ as in* (3), *(i.e., for encoding functions exploiting the cognition at the transmitters) the output sequences observed at the receivers in Group B can be reconstructed from the messages $\{M_k\}_{k\in\mathcal{A}}$ intended to the receivers in Group A, the output sequences observed at the receivers in Group A, and the genie information.*

Proof: By Remark 9, it suffices to show that the output sequences $\{\boldsymbol{Y}_{1+m\beta}\}_{m=0}^{\gamma-1}$ can be perfectly reconstructed from the messages $\{M_k\}_{k\in\mathcal{A}}$, all other channel output sequences, and the genie information.

We first notice that by the definition of the set $\mathcal{A}$ and by Remark 8, the set $\{M_k\}_{k\in\mathcal{A}}$ includes messages $\{M_{r_\ell+2+\nu+m\beta}\}_{\substack{0\leq\nu\leq t_\ell+t_r \\ 0\leq m\leq\gamma-1}}$, where out of range indices should be ignored. Thus, based on the messages $\{M_k\}_{k\in\mathcal{A}}$ the input sequences $\{\boldsymbol{X}_{t_\ell+r_\ell+2+m\beta}\}_{m=0}^{\gamma-1}$, can be reconstructed as:

$$\boldsymbol{X}_{r_\ell+t_\ell+2+m\beta} \\ = f^{(n)}_{r_\ell+t_\ell+2+m\beta}(M_{r_\ell+2+m\beta}, \ldots, M_{r_\ell+t_\ell+t_r+2+m\beta}).$$

Using these reconstructed input sequences, based on the output sequences observed at the receivers in Group A, and based on the genie-information $\{\boldsymbol{V}_m\}_{m=0}^{\gamma-1}$ it is then possible to reconstruct the channel outputs $\{\boldsymbol{Y}_{1+m\beta}\}_{m=0}^{\gamma-1}$ as follows:

$$\boldsymbol{Y}_1 = -\sum_{\nu=1}^{t_\ell+r_\ell+1} \left(-\frac{1}{\alpha}\right)^{\nu} \boldsymbol{Y}_{1+\nu} \\ + \left(-\frac{1}{\alpha}\right)^{t_\ell+r_\ell+1} \boldsymbol{X}_{t_\ell+r_\ell+2} + \boldsymbol{V}_0$$

and, for $m \in \{1, \ldots, \gamma-1\}$,

$$\boldsymbol{Y}_{1+m\beta} \\ = -\sum_{\nu=1}^{t_\ell+r_\ell+1} \left(-\frac{1}{\alpha}\right)^{\nu} \boldsymbol{Y}_{1+m\beta+\nu} - \sum_{\nu=1}^{r_r+t_r} (-\alpha)^{\nu} \boldsymbol{Y}_{1+m\beta-\nu} \\ + \left(-\frac{1}{\alpha}\right)^{t_\ell+r_\ell+1} \boldsymbol{X}_{t_\ell+r_\ell+2+m\beta} \\ - (-\alpha)^{t_r+r_r+1} \boldsymbol{X}_{t_\ell+r_\ell+2+(m-1)\beta} + \boldsymbol{V}_m. \qquad \blacksquare$$

3) Cognitive MAC Network: The Cognitive MAC Network is obtained from the Genie-Aided Network by eliminating the receivers in Group B and by requiring that the receivers in Group A decode *all* the messages $M_1, \ldots, M_K$. Since the receivers in Group A can cooperate and the transmitters are unchanged compared to the original network, the Cognitive MAC Network is indeed a MAC with cognitive transmitters. In the following, we shall refer to the union of Group A receivers as *the Group A receiver*.

4) Analysis: As previously outlined, the desired upper bound on $\mathcal{S}(K, t_\ell, t_r, r_\ell, r_r)$ follows by Inclusion (24) and Upper Bound (25). We first prove (24), followed by (25) (Lemma 2 ahead).

Towards proving (24), we notice that cooperation and genie-information at the receivers can only increase the capacity region. Thus, denoting the capacity region of the Rx-Cooperative Network by $\mathcal{C}_{\text{Coop}}(K, t_\ell, t_r, r_\ell, r_r; P)$ and the capacity region of the Genie-Aided Network by $\mathcal{C}_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P)$, we have

$$\mathcal{C}(K, t_\ell, t_r, r_\ell, r_r; P) \subseteq \mathcal{C}_{\text{Coop}}(K, t_\ell, t_r, r_\ell, r_r; P) \\ \subseteq \mathcal{C}_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P).$$

Combined with the following Lemma 1, this establishes (24).

Lemma 1. *The capacity region of the Genie-Aided Network is included in the capacity region of the Cognitive MAC Network:*

$$\mathcal{C}_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P) \subseteq \mathcal{C}_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r; P).$$

Proof: Follows by proving that every coding scheme for the Genie-Aided Network can be modified to a coding scheme for the Cognitive MAC Network such that whenever the original scheme is successful (i.e, all messages are decoded correctly), then so is the modified scheme.

This can be seen as follows. Given a coding scheme for the Genie-Aided Network, we propose the following coding scheme for the Cognitive MAC Network. We assume that the transmitters of the Cognitive MAC Network apply the same encodings as in the original scheme. The only receiver, i.e., the Group A receiver, decodes its desired messages $M_1, \ldots, M_K$ according to the following three steps: 1.) it first decodes Messages $\{M_k\}_{k\in\mathcal{A}}$ as in the given original scheme; 2.) it then attempts to reconstruct the channel output sequences observed by the receivers in Group B in the Genie-Aided Network; and 3.) based on these reconstructions, it finally decodes the remaining messages in the same way as the receivers in Group B did in the original scheme. By Remark 10, the Group A receiver can perfectly reconstruct the output sequences observed at the Group B receivers, whenever it decoded Messages $\{M_k\}_{k\in\mathcal{A}}$ correctly. Thus, the additional reconstruction step in the modified scheme does not introduce additional error events compared to the original scheme. ■

Lemma 2. *The multiplexing gain of the Cognitive MAC Network satisfies*

$$\mathcal{S}_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r) \leq K - \gamma.$$

Proof: Let $a_1, \ldots, a_{|\mathcal{A}|}$ denote the elements of the set $\mathcal{A}$. Since the Group A receiver is required to decode all K messages $M_1, \ldots, M_K$, by Fano's inequality, reliable communication is possible only if

$$\begin{aligned}\sum_{k=1}^{K} R_k &\le I(\boldsymbol{Y}_{a_1},\dots,\boldsymbol{Y}_{a_{|\mathcal{A}|}},\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1};M_1,\dots,M_K)\\ &= I(\boldsymbol{Y}_{a_1},\dots,\boldsymbol{Y}_{a_{|\mathcal{A}|}};M_1,\dots,M_K|\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1})\\ &\quad +I(\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1};M_1,\dots,M_K)\\ &= I(\boldsymbol{Y}_{a_1},\dots,\boldsymbol{Y}_{a_{|\mathcal{A}|}};M_1,\dots,M_K|\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1})\\ &\le h(\boldsymbol{Y}_{a_1})+\dots+h(\boldsymbol{Y}_{a_{|\mathcal{A}|}})\\ &\quad -h(\boldsymbol{N}_{a_1},\dots,\boldsymbol{N}_{a_{|\mathcal{A}|}}|\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1})\\ &\le (K-\gamma)\frac{1}{2}\log\left(1+P(1+\alpha)^2\right)\\ &\quad -h(\boldsymbol{N}_{a_1},\dots,\boldsymbol{N}_{a_{|\mathcal{A}|}}|\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1}),\end{aligned}$$

where the first equality follows by the chain rule of mutual information; the second equality follows by the independence of the noise sequences and the messages; the second inequality follows because conditioning reduces differential entropy; and the last inequality follows by the max-entropy theorem.

The differential entropy $h(\boldsymbol{N}_{a_1},\dots,\boldsymbol{N}_{a_{|\mathcal{A}|}}|\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1})$ depends only on α but not on P. Moreover, it is finite (and thus bounded), because the tuple $(\boldsymbol{N}_{a_1},\dots,\boldsymbol{N}_{a_{|\mathcal{A}|}},\boldsymbol{V}_0,\dots,\boldsymbol{V}_{\gamma-1})$ is jointly Gaussian with nonsingular covariance matrix. Therefore, whenever we have reliable communication,

$$\varlimsup_{P\to\infty}\frac{\sum_{k=1}^{K}R_k}{\frac{1}{2}\log(P)}\le K-\gamma, \tag{26}$$

which concludes the proof of the lemma. ■

V. ACHIEVABILITY PROOF OF THEOREM 2

For each of the four lower bounds 1)–4) in Theorem 2, i.e., Inequalities (11)–(14), we present a scheme achieving this lower bound. The four schemes are very similar. They all rely on the idea of switching off some of the transmitter/receiver pairs, and on using the strategies described in Section V-A over the resulting subnets. (Here, by silencing transmitter/receiver pairs we intend that we silence the antennas at the transmitters and ignore the corresponding antennas at the receivers. This splits the networks into non-interfering subnets.) However, our four schemes differ in that in each scheme we silence a different set of transmitter/receiver pairs.

We first describe the strategies used to communicate over the subnets (Section V-A). Then, we present the set of transmitter/receiver pairs that needs to be silenced in each of the four schemes, so that they achieve the lower bounds in 1)–4) (Sections V-C–V-F).

A. Scheme used in Subnets

Since in our four schemes we silence certain transmitters and ignore the antennas at the corresponding receivers, in all of the resulting subnets there are as many transmitters as receivers. As we shall see, moreover, in our schemes we silence transmitter/receiver pairs in a way that the resulting subnets have at most $t_\ell + r_\ell + 1$ transmitter/receiver pairs.

Let κ be the number of transmitter/receiver pairs in a subnet. Then $\kappa \le t_\ell + r_\ell + 1$. We first assume that

$$\kappa = t_\ell + r_\ell + 1, \tag{27}$$

and present a coding scheme that achieves a multiplexing gain of rank$(\mathsf{H}_\kappa(\alpha))$ under this assumption. Then we describe how to modify this scheme to achieve a multiplexing gain of rank$(\mathsf{H}_\kappa(\alpha))$ when $\kappa < t_\ell + r_\ell + 1$.

To describe our coding scheme, we assume that the subnet consists of transmitter/receiver pairs $1,\dots,\kappa$, and distinguish three cases.

1.) The transmitters and the receivers have equally much side-information:
$$r_\ell + r_r = t_\ell + t_r. \tag{28}$$
2.) The transmitters have more side-information than the receivers:
$$t_\ell + t_r > r_\ell + r_r. \tag{29}$$
3.) The receivers have more side-information than the transmitters:
$$r_\ell + r_r < r_\ell + t_r. \tag{30}$$

In the first case, we use a Multi-Input/Multi-Output (MIMO) point-to-point scheme, in the second case a MIMO broadcast scheme, and in the third case a MIMO multi-access scheme.

We first describe the MIMO point-to-point scheme for case 1.). In this case (10) and (28) imply that

$$t_\ell = r_r \quad \text{and} \quad t_r = r_\ell. \tag{31}$$

Therefore all κ transmitters are cognizant of Message M_{t_r+1} and Receiver (t_r+1) has access to all $\kappa = (t_\ell+r_\ell+1)$ antennas in the network. Thus, all the transmitters can act as a single transmitter that transmits Message M_{t_r+1} to Receiver (t_r+1) which can decode the Message based on all the antennas in the network. Using an optimal MIMO point-to-point scheme for this transmission achieves a multiplexing gain of rank$(\mathsf{H}_\kappa(\alpha))$.

We next describe the MIMO broadcast scheme for case 2.). Notice that (10) and (29) imply that

$$r_\ell < t_r. \tag{32}$$

By (10) all the transmitters are cognizant of Messages $\{M_{r_\ell+1},\dots,M_{t_r+1}\}$ and Receivers $(r_\ell+1),\dots,(t_r+1)$ *jointly* have access to all the $\kappa = (t_\ell + r_\ell + 1)$ antennas in the network. In our scheme all the transmitters act as a big common transmitter that transmits Messages $\{M_{r_\ell+1},\dots,M_{t_r+1}\}$. In contrast, Receivers $(r_\ell+1),\dots,(t_r+1)$ act as independent receivers, in the sense that Receiver $(r_\ell+1)$ only makes use of the signals observed at antennas $1,\dots,r_\ell+1$ (and ignores its knowledge about the signals observed at other antennas), Receivers $(r_\ell+2),\dots,t_\ell$ only make use of the signal observed at their own antennas, and Receiver (t_r+1) only makes use of the signals observed at antennas $t_r+1,\dots,t_r+r_r+1$.[4] The big combined transmitter then uses an optimal MIMO broadcast scheme to transmit Messages $\{M_{r_\ell+1}, \ldots, M_{t_r+1}\}$ to the independent Receivers $(r_\ell+1), \ldots, (t_r+1)$, and hence achieves a multiplexing gain of rank$(\mathsf{H}_\kappa(\alpha))$.

---

[4] Notice that the described assignment of antennas to receivers is only one possible assignment that leads to the desired multiplexing gain. Other assignments are possible.

We finally describe the MIMO multi-access scheme for case 3.). Notice that (10) and (30) imply that

$$t_r < r_\ell. \tag{33}$$

By (10) each transmitter knows at least one of the Messages $M_{t_r+1}, \ldots, M_{r_\ell+1}$, and Receivers $(t_r+1), \ldots, (r_\ell+1)$ all have access to all receiving antennas in the network. In our scheme the first t_r+1 transmitters $1, \ldots, t_r+1$ act as a big common transmitter that transmits Message M_{t_r+1}. Similarly, the last $t_\ell+1$ transmitters $r_\ell+1, \cdots, r_\ell+t_\ell+1$ act as a big common transmitter that transmits Message $M_{r_\ell+1}$. Transmitters $t_r+2, \ldots, r_\ell$ act as single transmitters that transmit their own messages (and ignore all other messages they are cognizant of). Receivers $(t_r+1), \ldots, (r_\ell+1)$ act as a big common receiver that decodes Messages $M_{r_\ell+1}, \ldots, Mr_\ell + t_\ell + 1$ based on all the antennas in the network. Applying an optimal MIMO MAC scheme from the multiple transmitters to the single receiver achieves a multiplexing gain of rank$(\mathsf{H}_\kappa(\alpha))$.

We conclude that with the above described schemes we can achieve a multiplexing gain of rank$(\mathsf{H}_\kappa(\alpha))$ when $\kappa = t_\ell + r_\ell + 1$, irrespective of the specific values of t_ℓ, r_ℓ.

We now consider the case where $\kappa < t_\ell + r_\ell + 1$ and again assume that the subnet consists of transmitter/receiver pairs $1, \ldots, \kappa$. In this case we let the transmitters and receivers ignore some of their side-information. That means, we choose parameters $t'_\ell \leq t_\ell$, $t'_r \leq t_r$, $r'_\ell \leq r_\ell$, and $r'_r \leq r_r$ such that $\kappa = t'_\ell + r'_\ell + 1 = t'_r + r'_r + 1$. Depending on the choice of the parameters $t'_\ell, t'_r, r'_\ell, r'_r$ one of the above three schemes achieves a multiplexing gain of rank$(\mathsf{H}_\kappa(\alpha))$.

We have thus proved the following proposition.

Proposition 4. *The above described scheme achieves a multiplexing gain of* rank$(\mathsf{H}_\kappa(\alpha))$ *over every subnet with* $\kappa \leq t_\ell + r_\ell + 1$ *transmitter/receiver pairs.*

B. Auxiliary Results

The following auxiliary results will be used in the proofs ahead.

Lemma 3. *Let a real number* α *and a positive integer* p *be given such that* $\det(\mathsf{H}_p(\alpha)) = 0$*. Then, the following statements hold.*

1) *The integer* $p \geq 2$.
2) *The determinants* $\det \mathsf{H}_{p-1}(\alpha)$, $\det(\mathsf{H}_{p+1}(\alpha))$, *and* $\det(\mathsf{H}_{p+2}(\alpha))$ *are all non-zero. Moreover, if* $p > 2$ *(and thus* $\mathsf{H}_{p-2}(\alpha)$ *is defined) also* $\det(\mathsf{H}_{p-2}(\alpha))$ *is non-zero.*

Proof: See Appendix A. ■

Corollary 4. *For every real number* α *and positive integer* p*, the rank of the matrix* $\mathsf{H}_p(\alpha)$ *is either* p *or* $p-1$*.*

Proof: Follows by noting that $H_{p-1}(\alpha)$ is a sub-matrix of $H_p(\alpha)$ and by Lemma 3. ■

C. Scheme Achieving the Lower Bound in 1), i.e., in (11)

Recall that (11) holds under the assumption that $K \leq t_\ell + r_\ell + 1$. In this case, we do not silence any transmitter/receiver pairs but we apply the scheme in the previous Subsection V-A directly to the network. By Proposition 4 this scheme achieves a multiplexing gain of rank$(\mathsf{H}_K(\alpha))$, which trivially equals K if $\det(\mathsf{H}_K(\alpha)) \neq 0$ and by Corollary 4 equals $K-1$ otherwise.

D. Scheme Achieving the Lower Bound in 2), i.e., in (12)

Recall that (12) holds under the assumption that $K > (t_\ell + r_\ell + 2)$ and $\det(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)) \neq 0$. We define

$$\tilde{\kappa} \triangleq K \mod (t_\ell + r_\ell + 2). \tag{34}$$

In our scheme, we switch off every $(t_\ell + r_\ell + 2)$ transmitter/receiver pair, i.e., in total $\left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor$ transmitter/receiver pairs. This decomposes the network into $\left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor$ subnets with $(t_\ell + r_\ell + 1)$ transmitter/receiver pairs and possibly a smaller last network with $\tilde{\kappa} \leq (t_\ell + r_\ell + 1)$ transmitter/receiver pairs. Thus, in each subnet we can apply the scheme described in Subsection V-A. By Proposition 4, our scheme achieves multiplexing gain rank$(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha))$ over the first $\left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor$ subnets and multiplexing gain rank$(\mathsf{H}_{\tilde{\kappa}}(\alpha))$ over the last smaller network (if it exists). By assumption $\det(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)) \neq 0$ and thus rank$(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)) = (t_\ell + r_\ell + 1)$; moreover, by Corollary 4, rank$(\mathsf{H}_{\tilde{\kappa}}(\alpha))$ is either equal to $\tilde{\kappa}$ or to $\tilde{\kappa} - 1$. Thus, the scheme achieves at least the desired multiplexing gain of $K - \left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor - 1$. In fact, whenever $\tilde{\kappa} = 0$ or $\det(\mathsf{H}_{\tilde{\kappa}}(\alpha)) \neq 0$, then the scheme even achieves a multiplexing gain of $K - \left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor$.

E. Scheme Achieving the Lower Bound in 3), i.e., in (13)

Recall that (13) holds under the assumption that $K > (t_\ell + r_\ell + 2)$; that $\det(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)) \neq 0$; and that $\det(\mathsf{H}_{t_\ell+r_\ell}(\alpha)) \neq 0$.

In our proof we distinguish two cases depending on $\tilde{\kappa}$ as defined in (34):

1) rank$(\mathsf{H}_{\tilde{\kappa}}(\alpha)) = \tilde{\kappa}$;
2) rank$(\mathsf{H}_{\tilde{\kappa}}(\alpha)) < \tilde{\kappa}$.

In case 1) we use the same scheme as in the previous Subsection V-D. As described above, this scheme achieves a multiplexing gain of rank$(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha))$ over the first $\left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor$ subnets and a multiplexing gain of rank$(\mathsf{H}_{\tilde{\kappa}}(\alpha))$ over the last smaller network. Since we assumed that $\det(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)) \neq 0$ and that rank$(\mathsf{H}_{\tilde{\kappa}}(\alpha)) = \tilde{\kappa}$, we conclude that the scheme achieves the desired multiplexing gain of $K - \left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor$ over the entire network.

We now treat case 2). Notice that in this case $\tilde{\kappa} < t_\ell + r_\ell$ because we assumed that $\det(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)) \neq 0$ and that $\det(\mathsf{H}_{t_\ell+r_\ell}(\alpha)) \neq 0$.

Let $\gamma_1 \triangleq \left\lfloor \frac{K}{t_\ell+r_\ell+2} \right\rfloor$, which by assumption is at least 1. We switch off transmitter/receiver pairs $\{g(t_\ell + r_\ell + 2)\}_{g=1}^{\gamma_1 - 1}$ and transmitter/receiver pair $\gamma_1(t_\ell+r_\ell+2)-1$. This way, the first $\left\lfloor \frac{K}{t_\ell+r_\ell+2}\right\rfloor-1$ subnets are of size $t_\ell+r_\ell+1$, the next subnet is of size $(t_\ell+r_\ell)$, and the last is of size $\tilde{\kappa}+1$ (where $\tilde{\kappa}$ is defined in (34)). Thus, all the subnets consist of at most $t_\ell+r_\ell+1$ transmitter/receiver pairs, and we can apply the scheme in Subsection V-A.

Since $\det(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha))\neq 0$, by Proposition 4, the scheme achieves a multiplexing gain of $t_\ell+r_\ell+1$ over each of the first $\left\lfloor \frac{K}{t_\ell+r_\ell+2}\right\rfloor-1$ subnets. Moreover, since we assumed that $\det(\mathsf{H}_{t_\ell+r_\ell}(\alpha))\neq 0$, the scheme achieves a multiplexing gain of $(t_\ell+r_\ell)$ over the next subnet. Finally, since we assumed that $\det(\mathsf{H}_{\tilde{\kappa}}(\alpha))=0$ by Lemma 3 we obtain that $\det(\mathsf{H}_{\tilde{\kappa}+1}(\alpha))\neq 0$, and thus our scheme achieves a multiplexing gain of $\tilde{\kappa}+1$ over the last subnet. We conclude that the scheme achieves full multiplexing gain (i.e., multiplexing gain equal to the number of transmitter/receiver pairs) in each subnet and hence a multiplexing gain of $K-\left\lfloor \frac{K}{t_\ell+r_\ell+2}\right\rfloor$ over the entire network.

F. Scheme Achieving the Lower Bound in 4), i.e., in (14)

Recall that (14) holds under the assumptions that $K>t_\ell+r_\ell+2$ and $\det(\mathsf{H}_{t_\ell+r_\ell+1})=0$.

We switch off every $(t_\ell+r_\ell+1)$ transmitter/receiver pair, i.e., in total $\left\lfloor \frac{K}{t_\ell+r_\ell+1}\right\rfloor$ transmitter/receiver pairs, and apply the scheme in Subsection V-A over the resulting subnets. Following similar lines as in the previous proof, it can be shown that all the resulting subnets have full-rank channel matrices and thus by Proposition 4 a multiplexing gain of $K-\left\lfloor \frac{K}{t_\ell+r_\ell+1}\right\rfloor$ is achieved over the entire network. The details of the proof are omitted.

VI. PROOF OF PROPOSITION 2

We first prove the lower bound 2), followed by the lower bounds in 3), 1), and 4).

A. Proof of Lower Bound 2), i.e., (16)

If $t_\ell=0$, then (16) follows from lower bound (17). Moreover, if $t_\ell+r_\ell\leq 1$, then there is nothing to prove, as the multiplexing gain cannot be negative.

Thus, in the following we assume that $t_\ell+r_\ell\geq 2$ and $t_\ell\geq 1$, and present a scheme that achieves the lower bound in (16) under this assumption. Our scheme is similar to the scheme for the asymmetric network described in Section IV-A—i.e., the scheme achieving the optimal multiplexing gain over the asymmetric network—when this latter scheme is specialized to $t_r=r_r=0$. (Notice that in particular our scheme here disregards the right side-information available at the transmitters and the receivers.) However, in contrast to the previous scheme for the asymmetric network, here due to the two-sided interference *pairs* of consecutive transmitters are silenced and the dirty-paper coding and the successive interference cancellation strategies have to "cancel" two interference signals as opposed to only one.

To simplify the description of our scheme, we define

$$\beta_2 \triangleq (t_\ell+r_\ell+1) \tag{35}$$

$$\gamma_2 \triangleq \left\lfloor \frac{K}{\beta_2}\right\rfloor. \tag{36}$$

Recall that in Proposition 2 we defined $\kappa_2\triangleq K \mod \beta_2$ and

$$\theta_2 \triangleq \begin{cases} 2, & \text{if } \kappa_2\geq 2\\ 1, & \text{if } \kappa_2=1\\ 0, & \text{if } \kappa_2=0. \end{cases} \tag{37}$$

In our scheme, we silence transmitters $\{m\beta_2+1\}_{m=0}^{\gamma_2-1}$ and transmitters $\{m\beta_2\}_{m=1}^{\gamma_2}$. Moreover, if $\theta_2=1$ we also silence transmitter $(\gamma_2\beta_2+1)$ and if $\theta_2=2$ then also transmitters $(\gamma_2\beta_2+1)$ and K. Notice that in total we silence $2\gamma_2+\theta_2$ transmitters. Silencing the chosen subset of transmitters splits the network into γ_2 non-interfering subnets if $\theta_2=0$ and into γ_2+1 non-interfering subnets if $\theta_2\geq 1$. In both cases, the first γ_2 subnets all have the same topology and consist of β_2-2 active transmitting antennas and of β_2 receiving antennas. In fact, the m-th subnet, for $m\in\{1,\ldots,\gamma_2\}$, consists of transmitting antennas $((m-1)\beta_2+2),\ldots,(m\beta_2-1)$ and receiving antennas $((m-1)\beta_2+1),\ldots,m\beta_2$. We call these subnets generic. If $\theta_2\geq 1$, then there is an additional last smaller subnet which consists of $\max\{\kappa_2-2,0\}$ active transmitting antennas and κ_2 receiving antennas. More precisely, it consists of transmitting antennas $(K-\kappa_2+2),\ldots,(K-1)$ (i.e., of no transmitting antennas if $\kappa\leq 2$) and of receiving antennas $(K-\kappa_2+1),\ldots,K$.

In our scheme, the transmitters ignore the messages pertaining to transmitters that belong to other subnets and the receivers ignore the signals observed by receivers in other subnets. Thus, we can describe the scheme for each of the subnets separately. In the following we describe a scheme that achieves a multiplexing gain of β_2-2 over each of the generic subnets. A similar scheme achieves a multiplexing gain of $\max\{\kappa_2-2,0\}$ over the last smaller subnet if it exists. (For brevity, the description of this latter scheme is omitted.) Thus, in each of the subnets we can achieve a multiplexing gain that equals the number of non-silenced transmitters. Consequently, our overall scheme achieves a multiplexing gain of $K-2\gamma_2-\theta_2$ over the entire network, which establishes the desired result.

To simplify the description of our scheme for generic subnets, we assume that the first subnet is generic and describe the scheme for this first subnet.

We define the sets

$$\mathcal{F}_1 \triangleq \{2,\ldots,r_\ell+1\} \tag{38}$$

$$\mathcal{F}_2 \triangleq \{r_\ell+2,\ldots,r_\ell+t_\ell\}. \tag{39}$$

Our scheme depends on the parameter $r_\ell\geq 0$. We first describe the scheme for the case where $r_\ell\geq 1$. The case $r_\ell=0$ is treated later.

If $r_\ell\geq 1$, then we transmit Messages $M_2,\ldots,M_{r_\ell+t_\ell}$ over the subnet. The first messages $M_2,\ldots,M_{r_\ell+1}$ are transmitted as follows.

- Transmitter k, for $k \in \mathcal{F}_1$, uses a Gaussian point-to-point code of variance P to encode its message M_k and sends the resulting codeword over the channel.
- Receiver k, for $k \in \mathcal{F}_1$, uses successive interference cancellation to decode Messages $M_2, \ldots, M_k$ starting from the first antenna. In contrast to the interference cancellation scheme used in the asymmetric network, here each message M'_k, for $k' \in \{2, \ldots, k\}$, is decoded based on antenna $(k'-1)$ as opposed to antenna k'. Moreover, here in general two interference sequences have to be cancelled before a message can be decoded based on an interference-free channel.

  For example, if $r_\ell > 4$, then Receiver 4 decodes its desired Message M_4 as follows. It first decodes Message M_2 based on Y_1^n and produces a reconstruction $\hat{X}_2^n$ of the input signal X_2^n. It then subtracts the reconstruction $\hat{X}_2^n$ from the signal Y_2^n and based on the resulting difference it decodes Message M_3. From its guess of M_3 it produces a reconstruction $\hat{X}_3^n$ of the signal X_3^n and subtracts the sum $\alpha\hat{X}_2^n + \hat{X}_3^n$ from Y_3^n. Finally, based on this difference it decodes its desired message M_4.
- Notice that for each $k \in \mathcal{F}_1$, if the previous decoding steps were successful, then Message M_k can be decoded based on $\alpha X_k^n + N_{k-1}^n$. Thus, the scheme achieves rates $R_2 = \ldots = R_{r_\ell+1} = \frac{1}{2}\log\left(1+\alpha^2 P\right)$.

If $t_\ell \geq 2$, then Messages $M_{r_\ell+2}, \ldots, M_{r_\ell+t_\ell}$ are transmitted as follows.

- For each $k \in \mathcal{F}_2$, Receiver k decodes Message M_k based on Receiver $(k-1)$'s signal Y_{k-1}^n to which it has access because $r_\ell \geq 1$. As we will see shortly, the receiver should apply a dirty-paper decoding rule to decode its desired message M_k.
- For each $k \in \mathcal{F}_2$, Transmitter k uses a dirty-paper code of power $\alpha^2 P$ and rate $R_k = \frac{1}{2}\log(1+\alpha^2 P)$ to encode its message M_k and mitigate the "interference" $\alpha X_{k-2}^n + X_{k-1}^n$ experienced at antenna $(k-1)$. Transmitter k can compute the "interference" $\alpha X_{k-2}^n + X_{k-1}^n$, because in our scheme the input sequence X_{k-2}^n depends only on messages $M_{r_\ell}, \ldots, M_{k-2}$ and X_{k-1}^n depends only on messages $M_{r_\ell}, \ldots, M_{k-1}$. These messages are known to Transmitter k, because $(k - r_\ell) \leq t_\ell$ for all $k \in \mathcal{F}_2$.

  Denoting the sequence produced by the dirty-paper encoding by $\tilde{X}_k^n$, the transmitter sends the scaled version $X_k^n = \frac{1}{\alpha}\tilde{X}_k^n$ over the channel. The scaling is performed to reverse the scaling by a factor α that is performed by the channel.
- The described scheme achieves rates $R_{r_\ell+2} = \cdots = R_{r_\ell+t_\ell} = \frac{1}{2}\log\left(1+\alpha^2 P\right)$.

We now describe the scheme for the case where $r_\ell = 0$. In this case Messages $M_1, \ldots, M_{t_\ell-1}$ are transmitted over the subnet. Notice that when $r_\ell = 0$, then the set $\mathcal{F}_1$ is empty and the set $\mathcal{F}_2 = \{2, \ldots, t_\ell\}$ contains all the active transmitters in the subnet. Since we assumed that $t_\ell + r_\ell \geq 2$, the set $\mathcal{F}_2$ is non-empty.

Transmitters $k \in \mathcal{F}_2$ employ the same scheme as described in the previous paragraph, except that now, instead of sending their own message M_k, they send their left-neighbor's message M_{k-1} (to which they have access because $t_\ell \geq 1$). Receivers $1, \ldots, t_\ell - 1$ decode their intended messages based on their own antenna using a dirty-paper decoder. The described scheme achieves rates $R_1 = \cdots = R_{t_\ell-1} = \frac{1}{2}\log\left(1+\alpha^2 P\right)$.

Thus, irrespective of whether $r_\ell \geq 1$ or $r_\ell = 0$, the described scheme achieves the desired multiplexing gain of $t_\ell + r_\ell - 1$ over the subnet. This concludes the proof.

Remark 11. *The described scheme uses all non-silenced transmitting antennas, but only the first $(t_\ell + r_\ell - 1)$ receiving antennas of each subnet. Thus, the last two receiving antennas in each subnet are ignored.*

B. Proof of Lower Bound 3)

By symmetry, this lower bound follows directly from (16). In particular, if $t_r \geq 1$ and $t_r + r_r \geq 2$, a scheme that is symmetric to the scheme described in the previous subsection VI-A achieves the desired multiplexing gain in 3) . We briefly sketch this scheme because we will use it to prove the lower bound in 1), (15), in Subsection VI-C ahead.

Define

$$\beta'_2 \triangleq (t_r + r_r + 1), \tag{40}$$

$$\gamma'_2 \triangleq \left\lfloor \frac{K}{\beta'_2} \right\rfloor, \tag{41}$$

$$\kappa'_2 \triangleq K \mod \beta'_2, \tag{42}$$

and

$$\theta'_2 \triangleq \begin{cases} 2, & \text{if } \kappa'_2 \geq 2 \\ 1, & \text{if } \kappa'_2 = 1 \\ 0, & \text{if } \kappa'_2 = 0. \end{cases} \tag{43}$$

We silence transmitters $\{m\beta'_2 + 1\}_{m=0}^{\gamma'_2 - 1}$ and transmitters $\{m\beta'_2\}_{m=1}^{\gamma'_2}$. Moreover, if $\theta'_2 = 1$ then we also silence transmitter $(\gamma'_2\beta'_2 + 1)$ and if $\theta'_2 = 2$ then also transmitters $(\gamma'_2\beta'_2 + 1)$ and K. This splits the network into γ'_2 generic subnets with $\beta'_2 - 2$ active transmitting antennas and β'_2 receiving antennas, and if $\theta'_2 \in \{1, 2\}$ then there is an additional smaller last subnet with $\max\{\kappa'_2 - 2, 0\}$ active transmitting antennas and κ'_2 receiving antennas.

We describe a scheme achieving multiplexing gain $\beta'_2 - 2$ over the generic subnets, and omit the scheme that achieves multiplexing gain $\max\{\kappa'_2 - 2, 0\}$ over the last smaller subnet (if it exists).

Define the sets $\mathcal{F}_3$ and $\mathcal{F}_4$ as:

$$\mathcal{F}_3 \triangleq \{2, \ldots, t_r\}$$
$$\mathcal{F}_4 \triangleq \{t_r + 1, \ldots, t_r + r_r\}.$$

If $r_r \geq 1$ transmission over the subnet is as follows:.

- For each $k \in \mathcal{F}_3$, Transmitter k uses a dirty-paper code of power $\alpha^2 P$ and rate $R_k = \frac{1}{2}\log(1+\alpha^2 P)$ to encode its message M_k and mitigate the "interference" $X_{k+1}^n + \alpha X_{k+2}^n$ experienced at antenna $(k+1)$. Transmitter k

can compute the "interference" $X_{k+1}^n + \alpha X_{k+2}^n$ because in our scheme the input sequence X_{k+2}^n depends only on messages $M_{k+2}, \dots, M_{t_r+1}$ and X_{k+1}^n depends only on messages $M_{k+1}, \dots, M_{t_r+1}$ which are all known to Transmitter k.

Denoting the sequence produced by the dirty-paper encoding by $\tilde{X}_k^n$, the transmitter sends the scaled version $X_k^n = \frac{1}{\alpha}\tilde{X}_k^n$ over the channel.

- For each $k \in \mathcal{F}_3$, Receiver k decodes Message M_k based on Receiver $(k+1)$'s signal Y_{k+1}^n to which it has access because $r_r \geq 1$. The decoding is performed using dirty-paper decoding.
- For each $k \in \mathcal{F}_4$, Transmitter k uses a Gaussian point-to-point code of variance P to send its message M_k. The corresponding Receiver k uses successive interference cancellation *from the right* starting with the last receiving antenna in the subnet and the last Message sent over the subnet. Thus, before decoding its desired message M_k each receiver first decodes all messages $M_{k'>k}$, for $k' \in \mathcal{F}_4$, where it decodes Message M_k' based on antenna $(k'+1)$. Notice that, in general, the receivers have to cancel two interference sequences $X_{k'+2}^n$ and $X_{k'+1}^n$, before they can decode Message $M_{k'}$ based on an interference-free observation $\alpha X_{k'}^n + N_{k'+1}^n$.

When $r_r = 0$, then the set $\mathcal{F}_4$ is empty and the set $\mathcal{F}_3$ contains all the active transmitters in the subnet. In this case, each active transmitter $k \in \mathcal{F}_3$ uses the same scheme as in the previous paragraph, except that instead of sending its own message M_k, it sends its *right-neighbor's* message M_{k+1} (to which it has access because $t_r \geq 1$ since we assumed that $t_r + r_r \geq 2$). For each $k \in \mathcal{F}_3$, Receiver $k+1$ then decodes its intended message based on its own antenna using dirty-paper decoding.

It is easily checked that this scheme achieves a multiplexing gain of $t_r + r_r - 1$ over the generic subnet.

Remark 12. *The scheme uses all non-silenced transmitting antennas, but only the last* $(t_r + r_r - 1)$ *receiving antennas in each subnet. Thus, the first two receiving antennas of each subnet are ignored.*

C. Proof of Lower Bound 1), i.e., (15)

If $t_\ell + r_\ell = 0$ or $t_r + r_r = 0$, then the proof follows directly from the lower bounds in 2) or 3). If $t_\ell + t_r + r_\ell + r_r \leq 2$, there is nothing to prove.

Thus in the following we assume that $t_\ell + t_r + r_\ell + r_r \geq 3$ and $(t_\ell + r_\ell), (t_r + r_r) \geq 1$. Define

$$\beta_1 \triangleq (t_\ell + t_r + r_\ell + r_r) \tag{44}$$

$$\gamma_1 \triangleq \left\lfloor \frac{K}{\beta_1} \right\rfloor, \tag{45}$$

and recall that in Proposition 2 we defined $\kappa_1 \triangleq K \mod \beta_1$ and

$$\theta_1 \triangleq \begin{cases} 2, & \text{if } \kappa_1 \geq 2 \\ 1, & \text{if } \kappa_1 = 1 \\ 0, & \text{if } \kappa_1 = 0. \end{cases} \tag{46}$$

In our scheme, we silence transmitters $\{m\beta_1 + 1\}_{m=0}^{\gamma_1 - 1}$ and transmitters $\{m\beta_1\}_{m=1}^{\gamma_1}$. Moreover, if $\theta_1 = 1$, then we also silence transmitter $(\gamma_1\beta_1 + 1)$, and if $\theta_1 = 2$, then also transmitters $(\gamma_1\beta_1 + 1)$ and K. Thus, in total we silence $2\gamma_1 + \theta_1$ transmitters. This splits the network into γ_1 or $\gamma_1 + 1$ non-interfering subnets: the first γ_1 generic subnets consist of $(\beta_1 - 2)$ transmitting antennas and β_1 receiving antennas, and if there is an additional last subnet then it is smaller and consists of $\max\{\kappa_1 - 2, 0\}$ transmitting antennas and of κ_1 receiving antennas.

We shortly describe a scheme that achieves a multiplexing gain of $\beta_1 - 2$ over a generic subnet. A similar scheme achieves multiplexing gain $\max\{\kappa_1 - 2, 0\}$ over the last smaller subnet if it exists. Thus, the combination of these schemes achieves a multiplexing gain of $K - 2\gamma_1 - \theta_1$ over the entire network.

We assume that the first subnet is generic and describe the scheme for this first subnet. To this end, define the groups

$$\mathcal{F}_{1/2} \triangleq \{2, \dots, r_\ell + t_\ell\}$$
$$\mathcal{F}_{3/4} \triangleq \{(r_\ell + t_\ell + 1), \dots, (r_\ell + t_\ell + t_r + r_r - 1)\}.$$

Our scheme is a combination of two schemes: a first scheme used for communication over the left part of the subnet which consists of transmitting antennas $k \in \mathcal{F}_{1/2}$ and receiving antennas $1, \dots, (t_\ell + r_\ell - 1)$; and a second scheme used for communication over the right part of the subnet which consists of transmitting antennas $k \in \mathcal{F}_{3/4}$ and receiving antennas $(r_\ell + t_\ell + 2), \dots, (t_\ell + r_\ell + t_r + r_r)$. Thus the combined scheme utilizes all the transmitting antennas in the subnet but ignores the two receiving antennas $(t_\ell + r_\ell)$ and $(t_\ell + r_\ell + 1)$. Notice that the signals sent at transmitting antennas $k \in \mathcal{F}_{1/2}$ in the first scheme do not influence the signals observed at receiving antennas $(r_\ell + t_\ell + 2), \dots, (t_\ell + r_\ell + t_r + r_r)$ employed in the second scheme. Similarly, the signals sent at transmitting antennas $k \in \mathcal{F}_{3/4}$ in the second scheme do not influence the signals observed at receiving antennas $1, \dots, (t_\ell + r_\ell - 1)$ employed in the first scheme. Therefore, the performance of the two schemes can be analyzed separately.

For communication over the left part of the subnet we choose the scheme described in Section VI-A. By Remark 11, this scheme involves transmitting antennas $2, \dots, (t_\ell + r_\ell)$ and receiving antennas $1, \dots, (t_\ell + r_\ell - 1)$. For communication over the right part of the subnet we choose the scheme described Section VI-B when the set $\mathcal{F}_3$ is replaced by the set $\{(r_\ell + t_\ell + 1), \dots, (t_\ell + r_\ell + t_r - 1)\}$ and the set $\mathcal{F}_4$ is be replaced by $\{(r_\ell + t_\ell + t_r), \dots, (r_\ell + t_\ell + t_r + r_r - 1)\}$. By Remark 12 this scheme involves transmitting antennas $(r_\ell + t_\ell + t_r), \dots, (r_\ell + t_\ell + t_r + r_r - 1)$ and receiving antennas $(t_\ell + r_\ell + 2), \dots, (t_\ell + r_\ell + t_r + r_r)$. Thus, as required, the combined scheme utilizes all the transmitting antennas in the subnet but ignores the receiving antennas $(t_\ell + r_\ell)$ and $(t_\ell + r_\ell + 1)$.

We conclude this section by analyzing the performance of our scheme. As outlined in the previous Subsections VI-A and VI-B, the scheme employed over the left part of the subnet achieves a multiplexing gain of $t_\ell + r_\ell - 1$, and the scheme employed over the right part of the subnet achieves a multiplexing gain of t_r+r_r-1. Thus, the way we combine the two schemes we achieve a multiplexing gain $t_\ell+t_r+r_\ell+r_r-2$ over the entire subnet.

D. Proof of Lower Bound 4), i.e., (17)

In our scheme the transmitters ignore their side-information. Define

$$\beta_3 \triangleq (r_\ell + r_r + 3) \tag{47}$$

$$\gamma_3 \triangleq \left\lfloor \frac{K}{\beta_3} \right\rfloor, \tag{48}$$

and recall that in Proposition 2 we defined $\kappa_3 \triangleq K \mod \beta_3$ and

$$\theta_3 \triangleq \begin{cases} 2, & \text{if } \kappa_3 \geq 2 \\ 1, & \text{if } \kappa_3 = 1 \\ 0, & \text{if } \kappa_3 = 0. \end{cases} \tag{49}$$

We silence transmitters $\{m\beta_3+1\}_{m=0}^{\gamma_3-1}$ and transmitters $\{m\beta_3\}_{m=1}^{\gamma_3}$. Moreover, if $\theta_3 = 1$, we also silence transmitter $\beta_3\gamma_3+1$, and if $\theta_3 = 2$, we also silence transmitters $\beta_3\gamma_3+1$ and K. Notice that in total we have silenced $2\gamma_3+\theta_3$ transmitters. This splits the network into γ_3 or γ_3+1 non-interfering subnets: the first γ_3 subnets consist of β_3-2 active transmitting antennas and β_3 receiving antennas (we call these subnets generic), and if an additional last subnet exists it is smaller and consists of $\max\{\kappa_3-2,0\}$ transmitting and κ_3 receiving antennas.

We assume that the first subnet is generic and describe a scheme achieving multiplexing gain β_3-2 over this first subnet. A similar scheme achieves a multiplexing gain of $\max\{\kappa_3-2,0\}$ over the last smaller subnet if it exists. Thus, our scheme achieves a multiplexing gain of one for each non-silenced transmitter, and the desired multiplexing gain of $K-2\gamma_3-\theta_3$ over the entire network.

Before describing the scheme, we define the groups

$$\mathcal{H}_1 \triangleq \{2,\ldots,r_\ell+1\}$$
$$\mathcal{H}_2 \triangleq \{r_\ell+2\}$$
$$\mathcal{H}_3 \triangleq \{r_\ell+3,\ldots,r_\ell+r_r+2\}.$$

In our scheme we send messages $M_2,\ldots,M_{r_\ell+r_r+2}$ as follows. For each $k \in (\mathcal{H}_1\cup\mathcal{H}_2\cup\mathcal{H}_3)$, Transmitter k encodes its Message M_k using a Gaussian point-to-point code. For each $k\in\mathcal{H}_1$, Receiver k decodes its message using successive interference cancellation from the *left*, starting with the *first* antenna in the subnet. These messages are decoded with arbitrary small probability of error (for sufficiently large block-lengths), whenever

$$R_2,\ldots,R_{r_\ell+1} \leq \frac{1}{2}\log\left(1+\alpha^2 P\right). \tag{50}$$

Similarly, for each $k\in\mathcal{H}_3$, Receiver k decodes its message using successive interference cancellation but now from the *right* and starting with the *last* antenna in the subnet. These messages are decoded with arbitrary small probability of error (for sufficiently large block-lengths), whenever

$$R_{r_\ell+3},\ldots,R_{r_\ell+r_r+2} \leq \frac{1}{2}\log\left(1+\alpha^2 P\right). \tag{51}$$

Finally, Receiver $r_\ell+2$, which has access to antennas $2,\ldots,(r_\ell+r_r+2)$, decodes its desired Message $M_{r_\ell+2}$ by decoding *all* the transmitted messages $M_2,\ldots,M_{r_\ell+r_r+2}$ using an optimal MIMO decoder [12]. In this step, we have arbitrary small probability of error, whenever

$$\sum_{i=2}^{r_\ell+r_r+2} R_i \leq \frac{1}{2}\log\left(\det\left(\mathsf{I}+P\mathsf{H}_{r_\ell+r_r+1}^{\mathsf{T}}\mathsf{H}_{r_\ell+r_r+1}\right)\right); \tag{52}$$

where here for ease of notation we wrote $\mathsf{H}_{r_\ell+r_r+1}$ instead of $\mathsf{H}_{r_\ell+r_r+1}(\alpha)$. Notice that since the channel matrix $H_{r_\ell+r_r+1}(\alpha)$ is non-singular and does not depend on the power P, by [12]:

$$\begin{aligned}\varlimsup_{P\to\infty} & \frac{\frac{1}{2}\log\left(\det\left(\mathsf{I}+P\mathsf{H}_{r_\ell+r_r+1}^{\mathsf{T}}\mathsf{H}_{r_\ell+r_r+1}\right)\right)}{\frac{1}{2}\log(P)} \\ &= r_\ell+r_r+1.\end{aligned} \tag{53}$$

Combining (50)–(53), we conclude that the described scheme can achieve a multiplexing gain of $r_\ell+r_r+1$ over the entire subnet.

VII. PROOF OF PROPOSITION 3

We first proof upper bound 1) (Subsection VII-A) and then upper bound 3) (Subsection VII-B). Upper bound 2) follows from 1) by symmetry and its proof is omitted.

A. Proof of Upper Bound 1), i.e., (18)

The proof is similar to the proof in Section IV-B. That means, we again introduce a *Cognitive MAC Network* and show that its capacity region $\mathcal{C}'_{\text{MAC}}(K,t_\ell,t_r,r_\ell,r_r;P)$ satisfies

$$\mathcal{C}(K,t_\ell,t_r,r_\ell,r_r;P) \subseteq \mathcal{C}'_{\text{MAC}}(K,t_\ell,t_r,r_\ell,r_r;P), \tag{54}$$

and its multiplexing gain $\mathcal{S}'_{\text{MAC}}(K,t_\ell,t_r,r_\ell,r_r)$ satisfies

$$\mathcal{S}'_{\text{MAC}}(K,t_\ell,t_r,r_\ell,r_r) \leq K-2\gamma_4-\theta_4. \tag{55}$$

Combining (54) and (55) proves the desired result.

As in Section IV-B, the Cognitive MAC Network is defined by means of the following three transformations: the original network is first enhanced to a *Rx-Cooperative Network*; the Rx-Cooperative Network is then enhanced to a *Genie-Aided Network*; and the latter is finally modified to the Cognitive MAC Network. More specifically, the Rx-Cooperative Network, the Genie-Aided Network, and the Cognitive MAC Network can be obtained from the orginal network in the way described in Sections IV-B1–IV-B3 if in the description the sets $\mathcal{A}$ and $\mathcal{B}$ are replaced by the sets $\mathcal{A}'$ and $\mathcal{B}'$ defined in Equations (56) and (60) ahead; the groups of receivers A and B are replaced by the groups A' and B' described after (60); and the genie-information $\boldsymbol{V}_1,\ldots,\boldsymbol{V}_{\gamma_1}$ are replaced by the genie-information $\{\boldsymbol{V}'_i\}$ in (61)–(63).

We first describe our new choices of the sets $\mathcal{A}'$ and $\mathcal{B}'$, the groups A' and B', and the genie-information $\{\boldsymbol{V}'_i\}$, followed by a proof of (54) and (55).

To simplify our description, we define

$$\begin{aligned}\beta_4 &\triangleq t_\ell + t_r + r_\ell + r_r + 4,\\ \gamma_4 &\triangleq \left\lfloor \frac{K}{\beta_4} \right\rfloor,\\ \kappa_4 &\triangleq K - \gamma_4\beta_4,\end{aligned}$$

and recall that θ_4 equals 1 if $\kappa_4 \geq \min\{t_\ell + r_\ell + 1, t_r + r_r + 1\}$, and it equals 0 otherwise.

We then choose the set $\mathcal{A}'$:

$$\mathcal{A}' \triangleq \bigcup_{m=0}^{\gamma_4 - 1} \mathcal{A}'_m; \tag{56}$$

where we define for $m \in \{0, \ldots, \gamma_4 - 2\}$:

$$\mathcal{A}'_m \triangleq \{(m\beta_4 + r_\ell + 2), \ldots, (m\beta_4 + r_\ell + t_\ell + t_r + 3)\}, \tag{57}$$

and if $\theta_4 = 0$ we define

$$\mathcal{A}'_{\gamma_4 - 1} \triangleq \{((\gamma_4 - 1)\beta_4 + r_\ell + 2), \ldots, (K - r_r - 1)\}, \tag{58}$$

whereas if $\theta_4 = 1$ we define

$$\begin{aligned}\mathcal{A}'_{\gamma_4 - 1} \triangleq \{&((\gamma_4 - 1)\beta_4 + r_\ell + 2), \ldots, (\gamma_4\beta_4 - r_r + 3)\}\\ &\cup \{(\gamma_4\beta_4 + r_\ell + 2), \ldots, K\}.\end{aligned} \tag{59}$$

The set $\mathcal{B}'$ is the complement of $\mathcal{A}'$:

$$\mathcal{B}' \triangleq \{1, \ldots, K\} \backslash \mathcal{A}'. \tag{60}$$

Group A' is then chosen as the set of receivers k for which $k \in \mathcal{A}'$, and Group B' as the set of receivers k for which $k \in \mathcal{B}'$.

We obtain a remark similar to Remark 9.

Remark 13. *If $\theta_4 = 0$, then the group of receivers A' jointly observes all output sequences except for output sequences $\{Y^n_{m\beta_4+1}, Y^n_{(m+1)\beta_4}\}_{m=0}^{\gamma_4-2}$, $Y^n_{(\gamma_4-1)\beta_4+1}$, and Y^n_K. If instead $\theta_4 = 1$, then it observes all output sequences except for $\{Y^n_{m\beta_4+1}, Y^n_{(m+1)\beta_4}\}_{m=0}^{\gamma_4-1}$ and $Y^n_{\gamma_4\beta_4+1}$.*

Before describing our new choice of the genie-information we make the following definitions. Define for every positive integer $p \geq 2$ and every non-zero number α the matrix $\mathsf{M}_p(\alpha)$ as the $p \times p$ matrix with diagonal elements α, first upper off-diagonal elements 1, second upper off-diagonal elements α, and all other elements 0. That means, the row-j_r column-j_c entry of the matrix $\mathsf{M}_p(\alpha)$ equals α if $j_r = j_c$ or $j_r = j_c - 2$, it equals 1 if $j_r = j_c - 1$, and it equals 0 otherwise. Let $\mathsf{M}_p^{\text{inv}}(\alpha)$ denote the inverse matrix of $\mathsf{M}_p(\alpha)$. This inverse always exists because $\det\left(\mathsf{M}\right)_p(\alpha) = \alpha^p$, which by our assumption $\alpha \neq 0$ is non-zero. As we will see shortly, our main interest lies in the inverses $\mathsf{M}^{\text{inv}}_{t_\ell + r_\ell + 1}(\alpha)$ and $\mathsf{M}^{\text{inv}}_{t_r + r_r + 1}(\alpha)$. To simplify notation, we therefore denote the row-j_r colum-j_c entry of $\mathsf{M}^{\text{inv}}_{t_\ell + r_\ell + 1}(\alpha)$ by a_{j_r, j_c} and the row-j_r colum-j_c entry of $\mathsf{M}^{\text{inv}}_{t_r + r_r + 1}(\alpha)$ by b_{j_r, j_c}.

The genie-information is then chosen as follows. If $\theta_4 = 1$, then the genie-information consists of $2\gamma_4 + 1$ vectors $\boldsymbol{V}'_1, \ldots, \boldsymbol{V}'_{2\gamma_4+1}$, where for i odd and $1 \leq i \leq 2\gamma_4 + 1$:

$$\begin{aligned}\boldsymbol{V}'_i \triangleq &\sum_{j=1}^{t_r + r_r + 1} \alpha b_{1,j} \boldsymbol{N}_{\frac{(i-1)}{2}\beta_4 - j}\\ &+ \sum_{j=1}^{t_\ell + r_\ell + 1} (a_{1,j} + \alpha a_{2,j}) \boldsymbol{N}_{\frac{(i-1)}{2}\beta_4 + 1 + j}\\ &- \boldsymbol{N}_{\frac{(i-1)}{2}\beta_4 + 1};\end{aligned} \tag{61}$$

and for i even and $2 \leq i \leq 2\gamma_4$:

$$\begin{aligned}\boldsymbol{V}'_i \triangleq &\sum_{j=1}^{t_r + r_r + 1} (b_{1,j} + \alpha b_{2,j}) \boldsymbol{N}_{\frac{i}{2}\beta_4 - j}\\ &+ \sum_{j=1}^{t_\ell + r_\ell + 1} \alpha a_{1,j} \boldsymbol{N}_{\frac{i}{2}\beta_4 + 1 + j} - \boldsymbol{N}_{\frac{i}{2}\beta_4}.\end{aligned} \tag{62}$$

If $\theta_4 = 0$, then the genie-information consists of $2\gamma_4$ vectors $\boldsymbol{V}'_1, \ldots, \boldsymbol{V}'_{2\gamma_4}$, where for i odd and $1 \leq i \leq 2\gamma_4 - 1$ the genie-information $\boldsymbol{V}'_i$ is defined by (61); for i even and $2 \leq i \leq 2(\gamma_4 - 1)$ it is defined by (62); and for $i = 2\gamma_4$:

$$\boldsymbol{V}'_{2\gamma_4} \triangleq \sum_{j=1}^{t_r + r_r + 1} (b_{1,j} + \alpha b_{2,j}) \boldsymbol{N}_{K-j} - \boldsymbol{N}_K. \tag{63}$$

Remark 14. *The genie information $\{\boldsymbol{V}'_i\}$ is such that, for given encoding functions $f_1^{(n)}, \ldots, f_K^{(n)}$ as in* (3), *(i.e., for encoding functions exploiting the cognition at the transmitters) all output sequences observed at the receivers in Group B' can be reconstructed from the messages $\{M_k\}_{k \in \mathcal{A}'}$ intended to the receivers in Group A', from the output sequences observed at these receivers, and from the genie information.*

Proof: See Appendix B ■

We now prove our desired results (54) and (55). Inclusion (54) is proved by the following set of inclusions. Denoting the capacity region of the Rx-Cooperative Network by $\mathcal{C}'_{\text{Coop}}(K, t_\ell, t_r, r_\ell, r_r; P)$ and the capacity region of the Genie-Aided Network by $\mathcal{C}'_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P)$, we have:

$$\begin{aligned}\mathcal{C}(K, t_\ell, t_r, r_\ell, r_r; P) &\subseteq \mathcal{C}'_{\text{Coop}}(K, t_\ell, t_r, r_\ell, r_r; P)\\ &\subseteq \mathcal{C}'_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P)\\ &\subseteq \mathcal{C}'_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r; P);\end{aligned} \tag{64}$$

where the first two inclusions hold because cooperation among receivers and genie-information can only increase capacity; and the last inclusion can be proved by following the steps in the proof of Lemma 1 (Section IV-B) where the group A needs to be replaced by the group A', and Remark 10 needs to be replaced by Remark 14.

The proof of Inequality (55) is similar to the proof of Lemma 2 in Section IV-B. In fact, following the steps in the proof of Lemma 2 but where the set $\mathcal{A}$ needs to be replaced by $\mathcal{A}'$ and the genie-information $\{\boldsymbol{V}_1, \ldots, \boldsymbol{V}_\gamma\}$ needs to be replaced by $\{\boldsymbol{V}'_1, \ldots, \boldsymbol{V}'_{2\gamma_4}\}$ if $\theta_4 = 0$ and by

$\{\boldsymbol{V}'_1, \ldots, \boldsymbol{V}'_{2\gamma_4+1}\}$ if $\theta_4 = 1$, then similar to (26) we can conclude that whenever we have reliable communication:

$$\overline{\lim_{P\to\infty}} \frac{\sum_{k=1}^{K} R_k}{\frac{1}{2}\log(P)} \le K - 2\gamma_4 - \theta_4.$$

This establishes the desired result (55).

B. Proof of Upper Bound 3), i.e., (19)

The proof is similar to the proofs of the converse to Theorem 1 and upper bound (18). As before, we introduce a Cognitive MAC Network and show that its capacity region $\mathcal{C}''_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r; P)$ satisfies:

$$\mathcal{C}(K, t_\ell, t_r, r_\ell, r_r; P) \subseteq \mathcal{C}''_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r; P), \quad (65)$$

and its multiplexing gain $\mathcal{S}''_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r)$:

$$\mathcal{S}''_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r) \le K - 2\gamma_5 - \theta_5, \quad (66)$$

which combined prove the desired result.

Again, the Cognitive MAC Network is introduced in three steps. The original network is first enhanced to a Rx-Cooperative Network, which is then enhanced to a Genie-Aided Network, and the latter is finally modified to a Cognitive MAC Network. The Rx-Cooperative Network is obtained from the original network as described in Section IV-B1, but where: the sets $\mathcal{A}$ and $\mathcal{B}$ need to be replaced by $\mathcal{A}''$ and $\mathcal{B}''$ defined in (70) and (71)) ahead; the groups A and B need to be replaced by A'' and B'' described after (71); here only the receivers in group A'' are allowed to cooperate but not the receivers in group B''. The Genie-Aided Network is obtained from the Rx-Cooperative Network in the way described in Section IV-B2 when A is replaced by A'' and the genie-information $\boldsymbol{V}_1, \ldots, \boldsymbol{V}_{\gamma_1}$ is replaced by $\{\boldsymbol{V}''_i\}$ defined in (73)–(75) ahead. The Cognitive MAC Network is finally obtained from the Genie-Aided Network in the way described in Section IV-B3 when the sets A and B are replaced by A'' and B''.

We first describe our choices of the sets $\mathcal{A}'', \mathcal{B}''$, the groups A'' and B'', and the genie-information $\{\boldsymbol{V}''_i\}$. We then prove our desired results (65) and (66).

To simplify our description, we define

$$\beta_5 \triangleq t_\ell + t_r + r_\ell + r_r + 3 \quad (67)$$

$$\gamma_5 \triangleq \left\lfloor \frac{K}{\beta_5} \right\rfloor \quad (68)$$

$$\kappa_5 \triangleq K - \beta_5\gamma_5 \quad (69)$$

and recall that θ_5 equals 1 if $\kappa_5 \ge t_r + r_r + 2$ and 0 otherwise.

We then define the set $\mathcal{A}''$ as:

$$\mathcal{A}'' \triangleq \bigcup_{m=0}^{\gamma_5} \mathcal{A}''_m, \quad (70)$$

where for $m = 0$:

$$\mathcal{A}''_0 \triangleq \{1, \ldots, t_r + 1\};$$

for $m \in \{1, \ldots, \gamma_5 - 1\}$:

$$\mathcal{A}''_m \triangleq \{m\beta_5 - t_\ell + 1, \ldots, m\beta_5 + t_r + 1\};$$

and if $\theta_5 = 1$:

$$\mathcal{A}''_{\gamma_5} = \{(\gamma_5\beta_5 - t_\ell + 1), \ldots, (K - r_r - 1)\},$$

whereas if $\theta_5 = 1$:

$$\mathcal{A}''_{\gamma_5} = \{(\gamma_5\beta_5 - t_\ell + 1), \ldots, K\}.$$

The set $\mathcal{B}''$ is the complement of $\mathcal{A}''$:

$$\mathcal{B}'' = \{1, \ldots, K\} \backslash \mathcal{A}''. \quad (71)$$

Group A'' is then chosen as the set of receivers k for which $k \in \mathcal{A}''$, and Group B'' as the set of receivers k for which $k \in \mathcal{B}''$.

Remark 15. *If $\theta_5 = 1$, then the union of group-A'' receivers has access to all the receiving antennas except for antennas $\{(m\beta_5 + t_r + r_r + 2), (m\beta_5 + t_r + r_r + 3)\}_{m=0}^{\gamma_5-1}$ and the last antenna K. If $\theta_5 = 0$, then it has access to all receiving antennas except for antennas $\{(m\beta_5 + t_r + r_r + 2), (m\beta_5 + t_r + r_r + 3)\}_{m=0}^{\gamma_5-1}$.*

We next describe our choice of the genie-information. To describe this choice, we need the following definitions and observations. For $j_r, j_c \in \{1, \ldots, t_\ell + r + \ell + 1\}$, denote the row-$j_r$ column-j_c entry of the matrix $\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)$ by h_{j_r,j_c}. Also, choose a set of real numbers $\{d_2, \ldots, d_{t_\ell+r_\ell+1}\}$ so that

$$h_{1,j_c} = \sum_{j_r=2}^{t_\ell+r_\ell+1} d_{j_r} h_{j_r,j_c}, \quad j_c \in \{1, \ldots, t_\ell + r_\ell + 1\}. \quad (72)$$

Such a choice always exists because of the assumption $\det(\mathsf{H}_{t_\ell+r_\ell+1}) = 0$.

The genie-information depends on the parameter θ_5. If $\theta_5 = 1$, then we choose the genie-information as the set of vectors $\boldsymbol{V}''_1, \ldots, \boldsymbol{V}''_{2\gamma_5+1}$, and if $\theta_5 = 0$ then we choose it as the set of the vectors $\boldsymbol{V}''_1, \ldots, \boldsymbol{V}''_{2\gamma_5}$, where for i odd and $1 \le i \le 2\gamma_5 - 1$:[5]

$$\begin{aligned}\boldsymbol{V}''_i \triangleq & \sum_{j=2}^{t_r+r_r+1} d_j \boldsymbol{N}_{\frac{i-1}{2}\beta_4+t_r+r_r+2+j} \\ & +\alpha \sum_{j_c=1}^{t_r+r_r+1} b_{1,j_c} \boldsymbol{N}_{\frac{i-1}{2}\beta_4+t_r+r_r+1-j_c} \\ & -\boldsymbol{N}_{\frac{i-1}{2}\beta_4+t_r+r_r+3}; \end{aligned} \quad (73)$$

for i even and $1 \le i \le 2\gamma_5$:

$$\begin{aligned}\boldsymbol{V}''_i \triangleq & \sum_{j_c=1}^{t_r+r_r+1} (\alpha b_{2,j_c} + b_{1,j_c}) \boldsymbol{N}_{\frac{i-2}{2}\beta_4+t_r+r_r+1-j_c} \\ & + \sum_{j_c=1}^{t_\ell+r_\ell+1} \alpha a_{1,j_c} \boldsymbol{N}_{\frac{i-2}{2}\beta_4+t_r+r_r+3+j_c} \\ & -N_{\frac{i-2}{2}\beta_4+t_r+r_r+2}; \end{aligned} \quad (74)$$

[5] Recall that a_{j_r,j_c} denotes the row-j_r column-j_c entry of the matrix $\mathsf{M}^{\text{inv}}_{t_\ell+r_\ell+1}(\alpha)$ defined in the previous Subsection VII-A; and where similarly b_{j_r,j_c} denotes the row-j_r column j_c entry of the matrix $\mathsf{M}^{\text{inv}}_{t_r+r_r++1}(\alpha)$ also defined in Subsection VII-A.

and for $i = 2\gamma_5 + 1$:

$$\boldsymbol{V}''_{2\gamma_5+1} \triangleq \sum_{j_c=1}^{t_r+r_r+1} (\alpha b_{2,j_c} + b_{1,j_c}) \boldsymbol{N}_{K-1-j_c} - N_K. \quad (75)$$

We next prove the desired Inclusion (65) and Inequality (66). We start with Inequality (66), as it is similar to the proof of Lemma 2 (Section IV-B). In fact, replacing in the proof of Lemma 2 the set $\mathcal{A}$ by $\mathcal{A}''$ and the genie-information $\{\boldsymbol{V}_1, \ldots, \boldsymbol{V}_\gamma\}$ by $\{\boldsymbol{V}''_1, \ldots, \boldsymbol{V}''_{2\gamma_5}\}$ if $\theta_5 = 0$ and by $\{\boldsymbol{V}''_1, \ldots, \boldsymbol{V}''_{2\gamma_5+1}\}$ if $\theta_5 = 1$, then similar to (26) one can conclude that whenever we have reliable communication,

$$\overline{\lim_{P\to\infty}} \frac{\sum_{k=1}^{K} R_k}{\frac{1}{2}\log(P)} \leq K - 2\gamma_5 - \theta_5,$$

which establishes (66).

It remains to prove Inclusion (65). Proving Inclusion (65) is more involved than proving the similar results (24) (Section IV-B) and (54) (previous Subsection VII-A), because the way we chose the group A'' and the genie-information $\{\boldsymbol{V}''_i\}$, it is not possible to reconstruct the outputs observed at the group of receivers B'' solely from the genie-information, from the messages intended to the receivers in group A'', and from the outputs observed at these receivers. (That means, a remark similar to Remarks 10 and 14 does not hold.) However, with our choice of the group A'' and the genie-information $\{\boldsymbol{V}''_i\}$ we can obtain a dynamic version of Remark 10 (see Remark 16 ahead), which suffices to prove (65).

Before, we can state this dynamic version, we need more definitions. The idea is that we define groups of receivers $\{B''(i)\}$ so that

1) the union of these receivers coincides with the group-B'' receivers; and
2) for each i it is possible to reconstruct the outputs at the receivers in group $B''(i)$ from the messages intended to the receivers in Groups $A'', B''(1), \ldots, B''(i-1)$, from the outputs observed at these receivers, and from the genie-information.

We define for each i odd and $1 \leq i < 2\gamma_5$:

$$\mathcal{B}''(i) \triangleq \left\{ \frac{(i-1)}{2}\beta_5 + t_r + r_r + r_\ell + 3 \right\}; \quad (76)$$

and for each i even and $2 \leq i \leq 2\gamma_5$:

$$\mathcal{B}''(i) \triangleq \left\{ \left(\left(\frac{i}{2} - 1 \right) \beta_5 + t_r + 2 \right), \ldots, \quad (77)$$

$$\left(\left(\frac{i}{2} - 1 \right) \beta_5 + t_r + r_r + r_\ell + 2 \right) \right\}. \quad (78)$$

If $\theta_5 = 1$, then additionally we also define:

$$\mathcal{B}''(2\gamma_5 + 1) \triangleq \{(K - r_r), \ldots, K\}. \quad (79)$$

Thus, we defined $2\gamma_5 + \theta_5$ sets $\mathcal{B}_1, \ldots, \mathcal{B}_{2\gamma_5+\theta_5}$. For each $i \in \{1, \ldots, 2\gamma_5 + \theta_5\}$ we call the receivers k with $k \in \mathcal{B}''(i)$ the group-$B''(i)$ receivers.

Notice that $\mathcal{B}'' = \bigcup_{i=1}^{2\gamma_5+\theta_5} \mathcal{B}''(i)$. Thus, our choice of the groups $\{B''(i)\}$ satisfies Property 1) above. By Remark 16 ahead, it also satisfies Property 2). To simplify the statement of this remark, we define $\mathcal{A}''(1) \triangleq \mathcal{A}''$, and for $i \in \{2, \ldots, 2\gamma_5 + \theta_5\}$:

$$\mathcal{A}''(i) \triangleq \mathcal{A}'' \cup \left(\bigcup_{i'=1}^{i-1} \mathcal{B}''(i') \right); \quad (80)$$

and for each $i \in \{1, \ldots, 2\gamma_5 + \theta_5\}$ we call the receivers k with $k \in \mathcal{A}''(i)$ the group-$A''(i)$ receivers.

Remark 16. *For each $i \in \{1, \ldots, 2\gamma_5 + \theta_5\}$, it is possible to reconstruct all outputs observed by the group-$B''(i)$ receivers from the genie-information $\boldsymbol{V}''_i$, from the messages $\{M_k\}_{k\in\mathcal{A}''(i)}$ intended to the group-$A''(i)$ receivers, and from the output sequences observed by these receivers.*

Proof: See Appendix C ■

We are now ready to prove Inclusion (65). Denoting the capacity region of the Rx-Cooperative Network by $\mathcal{C}''_{\text{Coop}}(K, t_\ell, t_r, r_\ell, r_r; P)$ and the capacity region of the Genie-Aided Network by $\mathcal{C}''_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P)$, we have:

$$\mathcal{C}(K, t_\ell, t_r, r_\ell, r_r; P) \subseteq \mathcal{C}''_{\text{Coop}}(K, t_\ell, t_r, r_\ell, r_r; P) \quad (81)$$

$$= \mathcal{C}''_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P). \quad (82)$$

where the two inclusions hold because cooperation among receivers and genie-information can only increase capacity. The following lemma establishes the desired Inclusion (65) and concludes the proof.

Lemma 4. *The capacity region of the Genie-Aided Network is included in the capacity region of the Cognitive MAC Network:*

$$\mathcal{C}''_{\text{Genie}}(K, t_\ell, t_r, r_\ell, r_r; P) \subseteq \mathcal{C}''_{\text{MAC}}(K, t_\ell, t_r, r_\ell, r_r; P).$$

Proof: The proof is similar to the proof of Lemma 1: it follows by proving that every coding scheme for the Genie-Aided Network can be modified to a coding scheme for the Cognitive MAC Network such that whenever the original scheme is successful (i.e, all messages are decoded correctly), then so is the modified scheme.

Given a coding scheme for the Genie-Aided Network, we propose the following scheme for the Cognitive MAC Network. The transmitters of the Cognitive MAC Network apply the same encodings as in the original scheme. The single receiver in the Cognitive MAC Network, i.e., the Group A'' receiver, first decodes Messages $\{M_k\}_{k\in\mathcal{A}}$ as in the given original scheme and then applies the following iterative procedure to decode the rest of the messages $\{M_k\}_{k\in\mathcal{B}''}$. The procedure consists of $2\gamma_5 + \theta_5$ iterations. In each iteration $i \in \{1, \ldots, 2\gamma_5 + \theta_5\}$, the Group A'' receiver performs the following two steps: 1.) it first attempts to reconstruct the outputs observed by the group-B''_i receivers; and 2.) thenbased on this reconstruction, it decodes messages $\{M_k\}_{k\in\mathcal{B}''_i}$ in the same way as the group-B''_i receivers decoded their messages in the original scheme. Notice that in this decoding rule, by the definition of the group $A''(i)$, prior to each iteration i the Group-A'' receiver has decoded the messages intended to the receivers in Group-$A''(i)$ and it has attempted to reconstruct the output sequences observed by the receivers in group $A''(i)$.

Thus, by Remark 16, in the first step of iteration i the Group-A'' receiver succeeds in reconstructing the outputs observed at the antennas of the group-B_i'' receivers whenever all previous reconstruction and decoding steps were successful. Thus, we can conclude that whenever in the original scheme all the messages were decoded correctly, then in our modified scheme all the reconstruction and decoding steps were successful. This concludes the proof. ■

ACKNOWLEDGMENTS

This work was supported by the ISRC, the Israel Science Foundation, and the European Commission in the framework of the FP7 Network of Excellence in Wireless COMmunications NEWCOM++.

APPENDIX A
PROOF OF LEMMA 3

By definition, $\det\left(\mathsf{H}_1(\alpha)\right) = 1$. Therefore, the integer p has to be at least 2 and Statement 1.) in the lemma follows.

Statement 2.) can be proved as follows. We define $\mathsf{H}_0(\alpha) = 1$ for all α's and note that also $\mathsf{H}_1(\alpha) = 1$, irrespective of α. We then have for each positive integer $q \geq 2$:

$$\det\left(\mathsf{H}_q(\alpha)\right) = \det\left(\mathsf{H}_{q-1}(\alpha)\right) - \alpha^2 \det\left(\mathsf{H}_{q-2}(\alpha)\right). \quad (83)$$

Thus, we can conclude that $\det\left(\mathsf{H}_p(\alpha)\right) = 0$ implies that the two determinants $\det\left(\mathsf{H}_{p-1}(\alpha)\right)$ and $\det\left(\mathsf{H}_{p-2}(\alpha)\right)$ are either both 0 or both non-zero, and similarly, that the two determinants $\det\left(\mathsf{H}_{p+1}(\alpha)\right)$ and $\det\left(\mathsf{H}_{p+2}(\alpha)\right)$ are either both 0 or both non-zero. However, two "consecutive" determinants $\det\left(\mathsf{H}_q(\alpha)\right)$ and $\det\left(\mathsf{H}_{q+1}(\alpha)\right)$ can only be 0 if all "previous" determinants $\det\left(\mathsf{H}_0(\alpha)\right), \ldots, \det\left(\mathsf{H}_{q-1}(\alpha)\right)$ are zero, which is not the case. Therefore, we conclude that the determinants $\det\left(\mathsf{H}_{p-2}(\alpha)\right), \det\left(\mathsf{H}_{p-1}(\alpha)\right), \det\left(\mathsf{H}_{p+1}(\alpha)\right)$, and $\det\left(\mathsf{H}_{p+2}(\alpha)\right)$ are non-zero, which concludes the proof of Statement 2.)

APPENDIX B
PROOF OF REMARK 14

By Remark 13 it suffices to show that if $\theta_4 = 0$, then the output sequences $\{\boldsymbol{Y}_{m\beta_4+1}, \boldsymbol{Y}_{(m+1)\beta_4}\}_{m=0}^{\gamma_4-2}$, $\boldsymbol{Y}_{(\gamma_4-1)\beta_4+1}$, and $\boldsymbol{Y}_K$ can be reconstructed, and if $\theta_4 = 1$, then the output sequences $\{\mathbf{Y}_{\mathbf{m}\beta_\mathbf{4}+\mathbf{1}}, \mathbf{Y}^{\mathbf{n}}_{(\mathbf{m}+\mathbf{1})\beta_\mathbf{4}}\}_{\mathbf{m}=\mathbf{0}}^{\gamma_\mathbf{4}-\mathbf{1}}$ and $\boldsymbol{Y}_{\gamma_4\beta_4+1}$ can be reconstructed.

Notice first that using the given encoding functions $f_1, \ldots, f_n$ the input sequences $\{\boldsymbol{X}_{m\beta_4+t_\ell+r_\ell+2}, \boldsymbol{X}_{m\beta_4+t_\ell+r_\ell+3}\}_{m=0}^{\gamma_4-1}$ can be computed from Messages $\{M_k\}_{k\in\mathcal{A}'}$. Moreover, if $\theta_4 = 0$ then additionally also the input sequences $\boldsymbol{X}_{(\gamma_4-1)+r_\ell+t_\ell+4}, \ldots, \boldsymbol{X}_{K-r_r-t_r-1}$ can be computed from $\{M_k\}_{k\in\mathcal{A}'}$, and if $\theta_4 = 1$ additionally also the input sequences $\boldsymbol{X}_{\gamma_4\beta_4+t_\ell+r_\ell+2}, \boldsymbol{X}_{K-r_r-t_r-1}$ can be computed from $\{M_k\}_{k\in\mathcal{A}'}$. The desired result is then proved by showing that each of the desired output sequences can be expressed as a linear combination of the genie-information, these computable inputs, and the outputs observed by the group-A' receivers.

We first show that the output sequence $\boldsymbol{Y}_{\beta_4}$ can be expressed as a linear combination of the inputs $\boldsymbol{X}_{t_\ell+r_\ell+2}$, $\boldsymbol{X}_{t_\ell+r_\ell+3}, \boldsymbol{X}_{\beta_4+t_\ell+r_\ell+2}, \boldsymbol{X}_{\beta_4+t_\ell+r_\ell+3}$ (which are computable from $\{M_k\}_{k\in\mathcal{A}'}$), the outputs $\boldsymbol{Y}_{t_\ell+r_\ell+3}, \ldots, \boldsymbol{Y}_{\beta_4-1}$ and $\boldsymbol{Y}_{\beta_4+2}, \ldots, \boldsymbol{Y}_{\beta_4+t_\ell+r_\ell+2}$ (which are observed by the group-A' receivers), and the genie-information $\boldsymbol{V}_2'$. To this end, we notice that by the channel law (9) the linear systems (84) and (85) on top of the next page hold for every time-instant $t \in \{1, \ldots, n\}$. Recalling that a_{j_r,j_c} denotes the row-j_r column-j_c entry of the inverse matrix $\mathsf{M}^{\text{inv}}_{t_\ell+r_\ell+1}(\alpha)$ and that b_{j_r,j_c} denotes the row-j_r column-j_c entry of the inverse matrix $\mathsf{M}^{\text{inv}}_{t_r+r_r+1}(\alpha)$, it is easily checked that (84) implies:

$$\begin{aligned}\sum_{j=1}^{t_r+r_r+1} b_{2,j}\boldsymbol{Y}_{\beta_4-j} - (b_{2,t_r+r_r}\alpha + b_{2,t_r+r_r+1})\boldsymbol{X}_{t_\ell+r_\ell+3}& \\ -b_{2,t_r+r_r+1}\alpha\boldsymbol{X}_{t_\ell+r_\ell+2}& \\ = \boldsymbol{X}_{\beta_4-1} + \sum_{j=1}^{t_r+r_r+1} b_{2,j}\boldsymbol{N}_{\beta_4-j};& \qquad (86)\end{aligned}$$

and

$$\begin{aligned}\sum_{j=1}^{t_r+r_r+1} b_{1,j}\boldsymbol{Y}_{\beta_4-j} - (b_{1,t_r+r_r}\alpha + b_{1,t_r+r_r+1})\boldsymbol{X}_{t_\ell+r_\ell+3}& \\ -b_{1,t_r+r_r+1}\alpha\boldsymbol{X}_{t_\ell+r_\ell+2}& \\ = \boldsymbol{X}_{\beta_4} + \sum_{j=1}^{t_r+r_r+1} b_{1,j}\boldsymbol{N}_{\beta_4-j};& \qquad (87)\end{aligned}$$

and that (85) implies:

$$\begin{aligned}\sum_{j=1}^{t_\ell+r_\ell+1} a_{1,j}\boldsymbol{Y}_{\beta_4+1+j} - a_{1,t_r+r_r+1}\alpha\boldsymbol{X}_{\beta_4+t_\ell+r_\ell+3}& \\ -(a_{1,t_r+r_r} + a_{1,t_r+r_r+1}\alpha)\boldsymbol{X}_{\beta_4+t_\ell+r_\ell+2}& \\ = \boldsymbol{X}_{\beta_4+1} + \sum_{j=1}^{t_\ell+r_\ell+1} a_{1,j}\boldsymbol{N}_{\beta_4+1+j}.& \qquad (88)\end{aligned}$$

Since the genie-information has been chosen so that

$$\begin{aligned}\boldsymbol{Y}_{\beta_4} = \alpha&\left(\boldsymbol{X}_{\beta_4-1} + \sum_{j=1}^{t_r+r_r+1} b_{2,j}\boldsymbol{N}_{\beta_4-j}\right) \\ &+\left(\boldsymbol{X}_{\beta_4} + \sum_{j=1}^{t_r+r_r+1} b_{1,j}\boldsymbol{N}_{\beta_4-j}\right) \\ &+\alpha\left(\boldsymbol{X}_{\beta_4+1} + \sum_{j=1}^{t_\ell+r_\ell+1} a_{1,j}\boldsymbol{N}_{\beta_4+1+j}\right) - \boldsymbol{V}_2' \qquad (89)\end{aligned}$$

the desired linear combination representing $\boldsymbol{Y}_{\beta_4}$ is easily obtained by combining the linear combinations on the left-hand sides of Equations (86)–(88) with the genie-information $\boldsymbol{V}_2'$.

We next prove that $\boldsymbol{Y}_{\beta_4+1}$ can be expressed as a linear combination of the inputs $\boldsymbol{X}_{t_\ell+r_\ell+2}$, $\boldsymbol{X}_{t_\ell+r_\ell+3}$, $\boldsymbol{X}_{\beta_4+t_\ell+r_\ell+2}$, $\boldsymbol{X}_{\beta_4+t_\ell+r_\ell+3}$ (which are computable from $\{M_k\}_{k\in\mathcal{A}'}$), the

$$\begin{pmatrix} Y_{\beta_4-1,t} \\ Y_{\beta_4-2,t} \\ \vdots \\ Y_{t_\ell+r_\ell+4,t} \\ Y_{t_\ell+r_\ell+3,t} \end{pmatrix} = \mathsf{M}_{t_r+r_r+1}(\alpha) \begin{pmatrix} X_{\beta_4,t} \\ X_{\beta_4-1,t} \\ \vdots \\ X_{t_\ell+r_\ell+5,t} \\ X_{t_\ell+r_\ell+4,t} \end{pmatrix} + \begin{pmatrix} 0 \\ 0 \\ \vdots \\ \alpha X_{t_\ell+r_\ell+3} \\ \alpha X_{t_\ell+r_\ell+2,t} + X_{t_\ell+r_\ell+3,t} \end{pmatrix} + \begin{pmatrix} N_{\beta_4-1,t} \\ N_{\beta_4-2,t} \\ \vdots \\ N_{t_\ell+r_\ell+4,t} \\ N_{t_\ell+r_\ell+3,t} \end{pmatrix} \tag{84}$$

$$\begin{pmatrix} Y_{\beta_4+2,t} \\ Y_{\beta_4+3,t} \\ \vdots \\ Y_{\beta_4+t_\ell+r_\ell+1,t} \\ Y_{\beta_4+t_\ell+r_\ell+2,t} \end{pmatrix} = \mathsf{M}_{t_\ell+r_\ell+1}(\alpha) \begin{pmatrix} X_{\beta_4+1,t} \\ X_{\beta_4+2,t} \\ \vdots \\ X_{\beta_4+t_\ell+r_\ell,t} \\ X_{\beta_4+t_\ell+r_\ell+1,t} \end{pmatrix} + \begin{pmatrix} 0 \\ 0 \\ \vdots \\ \alpha X_{\beta_4+t_\ell+r_\ell+2} \\ X_{\beta_4+t_\ell+r_\ell+2,t} + \alpha X_{\beta_4+t_\ell+r_\ell+3,t} \end{pmatrix} + \begin{pmatrix} N_{\beta_4+2,t} \\ N_{\beta_4+3,t} \\ \vdots \\ N_{\beta_4+t_\ell+r_\ell+1,t} \\ N_{\beta_4+t_\ell+r_\ell+2,t} \end{pmatrix} \tag{85}$$

---

outputs $\boldsymbol{Y}_{t_\ell+r_\ell+3}, \ldots, \boldsymbol{Y}_{\beta_4-1}$ and $\boldsymbol{Y}_{\beta_4+2}, \ldots, \boldsymbol{Y}_{\beta_4+t_\ell+r_\ell+2}$ (which are observed by the group-A' receivers), and the genie-information $\boldsymbol{V}_3'$. To this end, notice that from (85)—in addition to (88)—it also follows that

$$\begin{aligned} \sum_{j=1}^{t_\ell+r_\ell+1} & a_{1,j} \boldsymbol{Y}_{\beta_4+1+j} - a_{2,t_r+r_r+1} \alpha \boldsymbol{X}_{\beta_4+t_\ell+r_\ell+3} \\ & - (a_{2,t_r+r_r} + a_{2,t_r+r_r+1}\alpha) \boldsymbol{X}_{\beta_4+t_\ell+r_\ell+2} \\ & = \boldsymbol{X}_{\beta_4+2} + \sum_{j=1}^{t_\ell+r_\ell+1} a_{2,j} \boldsymbol{N}_{\beta_4+1+j}. \end{aligned} \tag{90}$$

Since the genie-information $\boldsymbol{V}_3'$ has been chosen so that

$$\begin{aligned} \boldsymbol{Y}_{\beta_4+1} = \alpha & \left(\boldsymbol{X}_{\beta_4} + \sum_{j=1}^{t_r+r_r+1} b_{1,j} \boldsymbol{N}_{\beta_4-j} \right) \\ & + \left(\boldsymbol{X}_{\beta_4+1} + \sum_{j=1}^{t_\ell+r_\ell+1} a_{1,j} \boldsymbol{N}_{\beta_4+1+j} \right) \\ & + \alpha \left(\boldsymbol{X}_{\beta_4+2} + \sum_{j=1}^{t_\ell+r_\ell+1} a_{2,j} \boldsymbol{N}_{\beta_4+1+j} \right) - \boldsymbol{V}_3' \end{aligned} \tag{91}$$

the desired linear combination representing $\boldsymbol{Y}_{\beta_4+1}$ is easily obtained by combining the left-hand sides of (87), (88), and (90) with the genie-information $\boldsymbol{V}_3'$.

The linear combinations representing the outputs $\{\boldsymbol{Y}_{m\beta_4}\}_{m=2}^{\gamma_4-1}$, and if $\theta_4 = 1$ then also the linear combination representing the outputs $\boldsymbol{Y}_{\gamma_4\beta_4}$, can be found in a similar way as the linear combination representing $\boldsymbol{Y}_{\beta_4}$. Specifically, the linear combination representing $\boldsymbol{Y}_{m\beta_4}$ can be obtained from the equations that result when in (86)–(89) each vector $\boldsymbol{X}_k$, for $k \in \{1, \ldots, K\}$, is replaced by $\boldsymbol{X}_{k+(m-1)\beta_4}$, each vector $\boldsymbol{Y}_k$ by $\boldsymbol{Y}_{k+(m-1)\beta_4}$, and each vector $\boldsymbol{N}_k$ by $\boldsymbol{N}_{k+(m-1)\beta_4}$, and the genie-information $\boldsymbol{V}_{2'}$ is replaced by $\boldsymbol{V}_{2m}'$.

The linear combinations representing the outputs $\boldsymbol{Y}_1$ and $\{\boldsymbol{Y}_{m\beta_4+1}\}_{m=2}^{\gamma_4-1}$, and if $\theta_4 = 1$ then also the linear combination representing the outputs $\boldsymbol{Y}_{\gamma_4\beta_4+1}$, can be found in a similar way as the linear combination representing $\boldsymbol{Y}_{\beta_4+1}$. Specifically, the linear combination representing $\boldsymbol{Y}_{m\beta_4+1}$ is easily obtained from the equations that result when in (87), (88), (90), and (91) the vectors $\boldsymbol{X}_k$, $\boldsymbol{Y}_k$, and $\boldsymbol{N}_k$, for $k \in \{1, \ldots, K\}$, are replaced by the vectors $\boldsymbol{X}_{k+(m-1)\beta_4}$,$\boldsymbol{Y}_{k+(m-1)\beta_4}$, and $\boldsymbol{N}_{k+(m-1)\beta_4}$ and the genie-information $\boldsymbol{V}_3'$ is replaced by $\boldsymbol{V}_{2m+1}'$. Here, when $m = 0$ all the out-of-range indices should be ignored, that means, $\boldsymbol{X}_k$, $\boldsymbol{Y}_k$, $\boldsymbol{N}_k$ are assumed to be deterministically 0 for all $k \leq 0$.

Finally, if $\theta_4 = 0$, then the linear combination representing $\boldsymbol{Y}_K$ can be obtained in a similar way as the linear combination representing $\boldsymbol{Y}_{\beta_4}$. Specifically, it can be obtained by combining the equations that result when in Equations (86), (87), and (89) the vectors $\boldsymbol{X}_k$, $\boldsymbol{Y}_k$, and $\boldsymbol{N}_k$ are replaced by the vectors $\boldsymbol{X}_{K-\beta_4}$,$\boldsymbol{Y}_{K-\beta_4}$, and $\boldsymbol{N}_{K-\beta_4}$ and the genie-information $\boldsymbol{V}_2'$ is replaced by $\boldsymbol{V}_{2\gamma_4}'$. Here again, all out-of-range indices should be ingored, i.e., $\boldsymbol{X}_k$, $\boldsymbol{Y}_k$, $\boldsymbol{N}_k$ are assumed to be deterministically 0 for all $k > K$.

APPENDIX C
PROOF OF REMARK 16

For each i odd and $1 \leq i \leq 2\gamma_5 - 1$, the group-$B_i''$ receivers observe antennas $\left(\frac{(i+1)}{2}\beta_5 + t_r + r_r + 3\right), \ldots, \left(\frac{(i-1)}{2}\beta_5 - t_\ell + r_r\right)$, which except for antenna $\frac{(i-1)}{2}\beta_5 + t_r + r_r + 3$ are also observed by the group-$A^{(i)}$ receivers. Thus, in this case it suffices to prove that the output sequence $\boldsymbol{Y}_{\frac{(i-1)}{2}\beta_5+t_r+r_r+3}$ can be reconstructed.

Similarly, for i even, the group-B_i'' receivers observe antennas $\left(\left(\frac{i}{2} - 1\right)\beta_5 + t_r - r_\ell + 2\right), \ldots, \left(\frac{i}{2}\beta_5 - t_\ell + r_r - 1\right)$, which except for antenna $\frac{(i-1)}{2}\beta_5 + t_r + r_r + 2 + 2$ are also observed by the group-$A^{(i)}$ receiver. Thus, it suffices to show that $\boldsymbol{Y}_{\frac{(i-1)}{2}\beta_5+t_r+r_r+2}$ can be reconstructed.

Finally, if $\theta_5 = 1$, then the group-$B_{2\gamma_5+1}''$ receiver observes antennas $\{K - r_\ell - r_r, \ldots, K\}$, which except for the last antenna K are also observed by the group-$A^{(2\gamma_5+1)}$ receivers. Thus, in this case it suffices to prove that outputs $\boldsymbol{Y}_K$ can be reconstructed.

Notice that using the encoding functions $f_1, \ldots, f_n$, for each i that is odd and satisfies $1 \leq i \leq 2\gamma_5 - 1$ amongst others the inputs $\boldsymbol{X}_{\frac{i-1}{2}\beta_5}$, $\boldsymbol{X}_{\frac{i-1}{2}\beta_5+1}$, and $\boldsymbol{X}_{\frac{i+1}{2}\beta_5}$ can be computed from the messages $\{M_k\}_{k \in \mathcal{A}^{(i)}}$. For each i that is even and that satisfies $2 \leq i \leq 2\gamma_5$ amongst others the inputs $\boldsymbol{X}_{\frac{i-1}{2}\beta_5}$,$\boldsymbol{X}_{\frac{i-1}{2}\beta_5+1}$, $\boldsymbol{X}_{\frac{i+1}{2}\beta_5}$, and $\boldsymbol{X}_{\frac{i+1}{2}\beta_5+1}$ can be computed from messages $\{M_k\}_{k\in\mathcal{A}^{(i)}}$. Finally, if $\theta_5 = 1$, then inputs $X_{K-t_\ell-r_\ell-2}$ and $X_{K-t_\ell-r_\ell-1}$ can be computed.

The desired result is then proved by showing that for each i the missing output sequences observed by the group-B''_i receivers but not by the group-$A^{(i)}$ receivers can be expressed as a linear combination of these inputs that can be computed from the messages in $\{M_k\}_{k\in\mathcal{A}^{(i)}}$, the output sequences observed by the group-$A^{(i)}$ receivers, and the genie-information $\boldsymbol{V}''_i$.

We first treat the case $i = 1$ and show that $\boldsymbol{Y}_{t_r+r_r+3}$ can be expressed as a linear combination of the inputs $\boldsymbol{X}_1$ and $\boldsymbol{X}_{\beta_5+1}$ (which are computable from messages $\{M_k\}_{k\in\mathcal{A}^{(1)}}$), the outputs $\{\boldsymbol{Y}_{t_r+r_r+2+j}\}_{j=2}^{t_\ell+r_\ell+1}$ and $\{\boldsymbol{Y}_{t_r+r_r+1-j}\}_{j=1}^{t_r+r_r+1}$ (which are observed by the group-$A^{(1)}$ receivers), and the genie-information $\boldsymbol{V}''_1$. To this end, we first notice that by the channel law (9) the linear system (92) on top of the next page holds for every time $t \in \{1, \ldots, n\}$. Recalling the definition of the parameters $\{d_2, \ldots, d_{t_\ell+r_\ell+1}\}$ in Section VII-B and because $\det(\mathsf{H}_{t_\ell+r_\ell+1}(\alpha)) = 0$, it is easily seen that (92) implies:

$$\begin{aligned}\boldsymbol{Y}_{t_r+r_r+3} = &\sum_{j=2}^{t_\ell+r_\ell+1} d_j\left(\boldsymbol{Y}_{t_r+r_r+2+j} - \boldsymbol{N}_{t_r+r_r+2+j}\right)\\ &-\alpha d_{t_\ell+r_\ell+1}\boldsymbol{X}_{\beta_5+1} + \alpha\boldsymbol{X}_{t_r+r_r+2} + \boldsymbol{N}_{t_r+r_r+3}.\end{aligned} \tag{93}$$

We next notice that by the channel law (9), for every time $t \in \{1, \ldots, n\}$, the linear system in (94) holds, where the matrix $\mathsf{M}_{t_r+r_r+1}$ is defined in Section VII-A. Recalling that b_{j_r,j_c} denotes the row-j_r column-j_c entry of the inverse $\mathsf{M}^{\text{inv}}_{t_r+r_r+1}(\alpha)$, Equation (94) implies:

$$\begin{aligned}&\sum_{j_c=1}^{t_r+r_r+1} b_{1,j_c}\boldsymbol{Y}_{t_r+r_r+2-j_c} - (b_{1,t_r+r_r+1} + \alpha b_{1,t_r+r_r})\boldsymbol{X}_1\\ &\qquad = \boldsymbol{X}_{t_r+r_r+2} + \sum_{j_c=1}^{t_r+r_r+1} b_{1,j_c}\boldsymbol{N}_{t_r+r_r+2-j_c}.\end{aligned} \tag{95}$$

Finally, recalling the definition of the genie-information

$$\begin{aligned}\boldsymbol{V}''_1 = &\sum_{j=2}^{t_r+r_r+1} d_j\boldsymbol{N}_{t_r+r_r+2+j} + \alpha\sum_{j_c=1}^{t_r+r_r+1} b_{1,j_c}\boldsymbol{N}_{t_r+r_r+2-j_c}\\ &-\boldsymbol{N}_{t_r+r_r+3}\end{aligned} \tag{96}$$

and combining (93) with (95) yields the desired linear combination

$$\begin{aligned}&\boldsymbol{Y}_{t_r+r_r+3}\\ &\quad= \sum_{j=2}^{t_\ell+r_\ell+1} d_j\boldsymbol{Y}_{t_r+r_r+2+j} + \alpha\sum_{j_c=1}^{t_r+r_r+1} b_{1,j_c}\boldsymbol{Y}_{t_r+r_r+2-j_c}\\ &\qquad -(b_{1,t_r+r_r+1} + \alpha b_{1,t_r+r_r})\boldsymbol{X}_1\\ &\qquad -\alpha d_{t_\ell+r_\ell+1}\boldsymbol{X}_{\beta_5+1} - \boldsymbol{V}''_1.\end{aligned} \tag{97}$$

For each i odd and $3 \leq i \leq 2\gamma_5 - 1$ the desired linear combination representing $\boldsymbol{Y}_{\frac{i-1}{2}\beta_5+t_r+r_r+3}$ can be found in a similar way as the linear combination representing $\boldsymbol{Y}_{t_r+r_r+3}$. Specifically, using Equations similar to (92)–(97) one can show that the outputs $\boldsymbol{Y}_{\frac{i-1}{2}\beta_5+t_r+r_r+3}$ can be expressed as the following linear combination:

$$\begin{aligned}\boldsymbol{Y}_{\frac{i-1}{2}\beta_5+t_r+r_r+3} = &\sum_{j=2}^{t_\ell+r_\ell+1} d_j\boldsymbol{Y}_{\frac{i-1}{2}\beta_5+t_r+r_r+2+j}\\ &+\alpha\sum_{j_c=1}^{t_r+r_r+1} b_{1,j_c}\boldsymbol{Y}_{\frac{i-1}{2}\beta_5+t_r+r_r+1-j_c}\\ &-(b_{1,t_r+r_r+1} + \alpha b_{1,t_r+r_r})\boldsymbol{X}_{\frac{i-1}{2}\beta_5+1}\\ &-\alpha b_{1,t_r+r_r+1}\boldsymbol{X}_{\frac{i-1}{2}\beta_5}\\ &-\alpha\beta_{t_\ell+r_\ell+1}\boldsymbol{X}_{\frac{i+1}{2}\beta_5+1} - \boldsymbol{V}''_i.\end{aligned} \tag{98}$$

We next consider the case where i is even and $2 \leq i \leq 2\gamma_5$, and show that in this case the outputs $\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2}$ can be expressed as a linear combination of the inputs $\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5}$, $\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+1}$, $\boldsymbol{X}_{(\frac{i}{2}+1)\beta_5}$, $\boldsymbol{X}_{(\frac{i}{2}+1)\beta_5+1}$, outputs $\{\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2-j}\}_{j=1}^{t_r+r_r+1}$ and $\{\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+3+j}\}_{j=1}^{t_\ell+r_\ell+1}$, and the genie-information $\boldsymbol{V}''_i$. The proof is similar to the proof presented in Appendix B, that means it is derived based on equations that are similar to equations (86)–(89). Obviously, (84) remains valid if for each $k \in \{1, \ldots, K\}$ the symbols $X_{k,t}$, $Y_{k,t}$, and $N_{k,t}$ are replaced by $X_{k+(\frac{i}{2}-1)\beta_5-(t_\ell+r_\ell+2),t}$, $Y_{k+(\frac{i}{2}-1)\beta_5-(t_\ell+r_\ell+2),t}$, and $N_{k+(\frac{i}{2}-1)\beta_5-(t_\ell+r_\ell+2),t}$, and therefore similar to (86) and (87) we obtain:

$$\begin{aligned}&\sum_{j=1}^{t_r+r_r+1} b_{2,j}\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_\ell+r_\ell+2-j} - b_{2,t_r+r_r+1}\alpha\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+1}\\ &\qquad -(b_{2,t_r+r_r}\alpha + b_{2,t_r+r_r+1})\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+1}\\ &\quad = \boldsymbol{X}_{t_r+r_r+1} + \sum_{j=1}^{t_r+r_r+1} b_{2,j}\boldsymbol{N}_{(\frac{i}{2}-1)\beta_5+1t_r+r_r+2-j}\end{aligned} \tag{99}$$

and

$$\begin{aligned}&\sum_{j=1}^{t_r+r_r+1} b_{1,j}\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_\ell+r_\ell+2-j} - b_{1,t_r+r_r+1}\alpha\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+1}\\ &\qquad -(b_{1,t_r+r_r}\alpha + b_{1,t_r+r_r+1})\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+1}\\ &\quad = \boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2} + \sum_{j=1}^{t_r+r_r+1} b_{1,j}\boldsymbol{N}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2-j}.\end{aligned} \tag{100}$$

Since also (85) remains valid if for each $k \in \{1, \ldots, K\}$ the symbols $X_{k,t}$, $Y_{k,t}$, and $N_{k,t}$ are replaced by $X_{k+(\frac{i}{2}-1)\beta_5-(t_\ell+r_\ell+3),t}$, $Y_{k+(\frac{i}{2}-1)\beta_5-(t_\ell+r_\ell+3),t}$, and

$$\begin{pmatrix} Y_{t_r+r_r+3,t} \\ Y_{t_r+r_r+4,t} \\ \vdots \\ Y_{\beta_5-1,t} \\ Y_{\beta_5,t} \end{pmatrix} = H_{t_\ell+r_\ell+1}(\alpha) \begin{pmatrix} X_{t_r+r_r+3,t} \\ X_{t_r+r_r+4,t} \\ \vdots \\ X_{\beta_5-1,t} \\ X_{\beta_5,t} \end{pmatrix} + \begin{pmatrix} \alpha X_{t_r+r_r+2,t} \\ 0 \\ \vdots \\ 0 \\ \alpha X_{\beta_5+1,t} \end{pmatrix} + \begin{pmatrix} \boldsymbol{N}_{t_r+r_r+3,t} \\ \boldsymbol{N}_{t_r+r_r+4,t} \\ \vdots \\ \boldsymbol{N}_{\beta_5-1,t} \\ \boldsymbol{N}_{\beta_5} \end{pmatrix} \tag{92}$$

$$\begin{pmatrix} Y_{t_r+r_r+1,t} \\ Y_{t_r+r_r,t} \\ \vdots \\ Y_{2,t} \\ Y_{1,t} \end{pmatrix} = \mathsf{M}_{t_r+r_r+1}(\alpha) \begin{pmatrix} X_{t_r+r_r+2,t} \\ X_{t_r+r_r+1,t} \\ \vdots \\ X_{3,t} \\ X_{2,t} \end{pmatrix} + \begin{pmatrix} 0 \\ 0 \\ \vdots \\ \alpha X_{1,t} \\ X_{1,t} \end{pmatrix} + \begin{pmatrix} N_{t_r+r_r+1,t} \\ N_{t_r+r_r,t} \\ \vdots \\ N_{2,t} \\ N_{1,t} \end{pmatrix} \tag{94}$$

$N_{k+(\frac{i}{2}-1)\beta_5-(t_\ell+r_\ell+3),t}$, we obtain similarly to (88):

$$\begin{aligned} \sum_{j=1}^{t_\ell+r_\ell+1} & a_{1,j}\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2+j} - a_{1,t_r+r_r+1}\alpha\boldsymbol{X}_{(\frac{i}{2}+1)\beta_5+1} \\ & -(a_{1,t_r+r_r} + a_{1,t_r+r_r+1}\alpha)\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5} \\ = {} & \boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+3} + \sum_{j=1}^{t_\ell+r_\ell+1} a_{1,j}\boldsymbol{N}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2+j}. \end{aligned} \tag{101}$$

Now, since the genie-information $\boldsymbol{V}_i''$ has been chosen so that Equality (102) holds, the desired linear combination representing $\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_\ell+r_\ell+2}$ is easily obtained by combining (99)–(102).

If $\theta_5 = 1$, then the desired linear combination representing $\boldsymbol{Y}_K$ can be found in a similar manner as in the previous Appendix B. The details are omitted.

APPENDIX D
PROOF OF PROPOSITION 1

Lemma 5. *For an integer p and a real number α, denote $u_p(\alpha) = \det(\mathsf{H}_p(\alpha))$. Then the following holds.*

1) *$u_p(\alpha)$ is a polynomial in α, $u_p(0) = 1$, and it satisfies the following second order recursion:*

$$u_{p+2}(\alpha) = u_{p+1}(\alpha) - \alpha^2 u_p(\alpha), \tag{103}$$

with the initial conditions $u_0(\alpha) = u_1(\alpha) = 1$. We denote by E_p the set of roots of $u_p(\alpha)$.

2) *For $\alpha \neq 0$, define*

$$v_p(\alpha) \triangleq \frac{u_p(\alpha)}{(-\alpha)^p}.$$

Then $v_p(\alpha)$ satisfies the second order recursion:

$$v_{p+2}(\alpha) = -\frac{1}{\alpha}v_{p+1}(\alpha) - v_p(\alpha), \tag{104}$$

with the initial conditions $v_{-1}(\alpha) = 0$ and $v_0(\alpha) = 1$. Moreover, for all $p \geq 1$ and $i \geq 0$,

$$\begin{aligned} & \begin{pmatrix} v_i & \cdots & v_{i+p-1} \end{pmatrix} \mathsf{H}_p = \\ & \qquad \begin{pmatrix} -\alpha v_{i-1} & 0 & \cdots & 0 & -\alpha v_{i+p} \end{pmatrix} \end{aligned} \tag{105}$$

where for simplicity we wrote v_i for $v_i(\alpha)$.

Proof: The determinant of a matrix is a polynomial function of the coefficients, and thus $u_p(\alpha)$ is a polynomial in α. Also, $u_p(0) = \det(\mathrm{Id}_p) = 1$, where Id_p denotes the p-by-p identity matrix. By expanding the determinant along the first line and then along the first column, one gets,

$$\begin{aligned} u_{p+2}(\alpha) &= u_{p+1}(\alpha) - \alpha \det \left(\begin{array}{c|cccc} \alpha & \alpha & 0 & \cdots & 0 \\ \hline 0 & & & & \\ \vdots & & & H_p & \\ 0 & & & & \end{array} \right) \\ &= u_{p+1}(\alpha) - \alpha^2 u_p(\alpha), \end{aligned}$$

establishing part 1) of the lemma.

Since (104) is a direct consequence of (103), and (105) is a direct consequence of (104), we also conclude part 2). ■

We give a proof of Proposition 1 for the case where q is odd. The case q even goes along the same lines. We define $\gamma''' \triangleq (q-1)/2$ and

$$\begin{aligned} L &\triangleq r_\ell + t_\ell \\ \beta''' &\triangleq 2L + 4. \end{aligned}$$

The proof follows the same pattern as the proof in Section VII-A. That means, we show that the capacity region of our network is included in the capacity region of a Cognitive MAC network and then we upper bound the power-offset of this Cognitive MAC network. The Cognitive MAC network is obtained from the original network in three steps: 1.) all receivers in some group A''' are allowed to cooperate; 2.) Genie-information $\{\boldsymbol{V}_i'''\}_{i=0}^{2\gamma'''}$ is given to the receivers in group A'''; and finally 3.) the genie-aided receivers in group A''' are required to jointly decode *all messages* $\{M_k\}_{k=1}^{K}$ whereas the rest of the receivers does not have to decode anything.

We describe the group A''' and the genie-information. We define the sets $\{\mathcal{A}_m'''\}_{m=1}^{\gamma'''}$ as follows: for $m = 0$,

$$\mathcal{A}_0''' \triangleq \{r_\ell + 2, \ldots, L + t_r + 2\},$$

for $1 \leq m \leq \gamma''' - 1$,

$$\mathcal{A}_m''' \triangleq \{m\beta''' + r_\ell + 1, \ldots, m\beta''' + L + t_r + 2\},$$

$$\begin{aligned}\boldsymbol{Y}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2} = \alpha &\left(\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+1} + \sum_{j=1}^{t_r+r_r+1} b_{2,j}\boldsymbol{N}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2-j}\right)\\ &+\left(\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2} + \sum_{j=1}^{t_r+r_r+1} b_{1,j}\boldsymbol{N}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+2-j}\right)\\ &+\alpha\left(\boldsymbol{X}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+3} + \sum_{j=1}^{t_\ell+r_\ell+1} a_{1,j}\boldsymbol{N}_{(\frac{i}{2}-1)\beta_5+t_r+r_r+1+j}\right) - \boldsymbol{V}'_2 \qquad (102)\end{aligned}$$

---

and for $m = \gamma'''$,

$$\mathcal{A}'''_m \triangleq \{\gamma'''\beta''' + r_\ell + 1, \ldots, K\}.$$

Moreover, we also define

$$\mathcal{B}'''_1 = \{r_\ell + 1\} \quad \text{and} \quad \mathcal{B}'''_2 = \{1, \ldots, K\} - \mathcal{A}''' \cup \mathcal{B}'''_1.$$

We say that a receiver k belongs to group A'''' if

$$k \in \mathcal{A}''' \triangleq \bigcup_{m=0}^{\gamma} \mathcal{A}'''_m,$$

and we say it belongs to group B'''_1 if $k \in \mathcal{B}'''_1$ and to group B'''_2 if $k \in \mathcal{B}'''_2$.

Notice that the receivers of group A''' have access to all the receiving antennas except for antennas

- 1,
- $m\beta''' - 1$ and $m\beta'''$, for $1 \le m \le \gamma'''$.

We define

$$\boldsymbol{V}'''_0 \triangleq -\alpha v_{L+1}\boldsymbol{X}_{L+1} + \sum_{j=0}^{L} v_j \boldsymbol{N}_{j+1},$$

which will be part of the genie-information given to the group A''' receivers. The rest of the genie-information $\{\boldsymbol{V}'''_i\}_{i=1}^{2\gamma'''}$ will be described later. Notice that unlike in the proof in Section VII-A, here part of the genie-information depends on the transmitted signal $\boldsymbol{X}_{L+1}$. However, the signal to noise ratio of $\boldsymbol{X}_{L+1}$ with respect to $\sum_{j=0}^{L} v_j \boldsymbol{N}_{j+1}$ goes to 0 like $(\alpha - \alpha^*)^\nu$ as α goes to α^*.

We now show that the capacity region of the original network is included in the capacity region of the Cognitive MAC network. We first prove that with the outputs observed at the receivers belonging to subset A''', with the genie-information and with the messages intended for the receivers in subset A''', one can reconstruct the signal received at Antenna 1, and therefore, all the outputs observed at the single receiver in group B'''_1. This follows because from the messages $\{M_k\}_{k\in\mathcal{A}}$ one can reconstruct $\boldsymbol{X}_{L+2}$, and because by

$$\begin{pmatrix}\boldsymbol{Y}_1\\ \vdots\\ \boldsymbol{Y}_L\\ \boldsymbol{Y}_{L+1}\end{pmatrix} = H_{L+1}\begin{pmatrix}\boldsymbol{X}_1\\ \vdots\\ \vdots\\ \boldsymbol{X}_{L+1}\end{pmatrix} + \begin{pmatrix}\boldsymbol{N}_1\\ \vdots\\ \vdots\\ \boldsymbol{N}_{L+1}\end{pmatrix} + \alpha\begin{pmatrix}0\\ \vdots\\ 0\\ \boldsymbol{X}_{L+2}\end{pmatrix}$$

and by (105), applied to $p = L + 1$ and $i = 0$,

$$\begin{aligned}\sum_{j=0}^{L} v_j \boldsymbol{Y}_{j+1} &= \alpha v_L \boldsymbol{X}_{L+2} - \alpha v_{L+1}\boldsymbol{X}_{L+1} + \sum_{j=0}^{L} v_j \boldsymbol{N}_{j+1}\\ &= \alpha v_L \boldsymbol{X}_{L+2} + \boldsymbol{V}'''_0.\end{aligned}$$

Now, defining the genie-information $\{\boldsymbol{V}_i\}_{i=1}^{2\gamma'''}$ as adequate linear combinations of the noise sequences at the receiving antennas, and following the steps of the proof in Section VII-A, one can construct a deterministic mapping from the channel outputs observed at the receivers belonging to groups A''' and B'''_1, the genie-information, and the messages intended for the receivers in groups A''' and B'''_1 to the channel outputs observed at the receivers in subgroup B'''_2. This concludes the proof that the capacity region of the original network is included in the capacity region of the Cognitive MAC network.

Let us now bound the sum-capacity of the cognitive MAC network:

$$\begin{aligned}&n\mathcal{C}_{\Sigma}^{Sym}(K, t_\ell, t_r, r_\ell, r_r; P)\\ &\quad\le I\left(\{\boldsymbol{Y}_i\}_{i\in\mathcal{A}'''}, \{\boldsymbol{V}_i\}_{0\le i\le 2\gamma'''}; M_1 \ldots, M_K\right)\\ &\quad= I\left(\{\boldsymbol{Y}_i\}_{i\in\mathcal{A}'''}; M_1, \ldots, M_K | \{\boldsymbol{V}_i\}_{0\le i\le 2\gamma'''}\right)\\ &\qquad\quad + I\left(\{\boldsymbol{V}_i\}_{0\le i\le 2\gamma'''}; M_1, \ldots, M_K\right).\end{aligned}$$

Let us deal with each term separately.

$$\begin{aligned}&I(\{\boldsymbol{Y}_i\}_{i\in\mathcal{A}'''}; M_1, \ldots, M_K | \{\boldsymbol{V}_i\}_{0\le i\le 2\gamma'''})\\ &\le \sum_{i\in\mathcal{A}'''} h(\boldsymbol{Y}_i) - h\left(\{\boldsymbol{N}_i\}_{i\in\mathcal{A}'''} \middle| \{\boldsymbol{V}_i\}_{1\le i\le 2\gamma'''}, \sum_{j=0}^{L} v_j \boldsymbol{N}_{j+1}\right)\\ &\le n(K - 2\gamma''' - 1)\frac{1}{2}\log(P) + nf_1(P, \alpha),\end{aligned}$$

where f_1 is such that $\lim_{\alpha\to\alpha_0}\lim_{P\to\infty} f_1(P, \alpha)$ exists and is finite.

Moreover, as can be verified, the genie-information

$\{\boldsymbol{V}_i\}_{1\leq i\leq 2\gamma'''}$ is independent of $(\boldsymbol{V}_0, M_1, \ldots, M_K)$, and

$$\begin{aligned} & I(\{\boldsymbol{V}_i\}_{1\leq i\leq 2\gamma'''}; M_1, \ldots, M_K) \\ & \quad = I(\boldsymbol{V}_0; M_1, \ldots, M_K) \\ & \quad \leq n\frac{1}{2}\log\left(1 + \frac{P\alpha^2 v_{L+1}^2(\alpha)}{\left\|\begin{pmatrix} v_0 & \cdots & v_L\end{pmatrix}\right\|_2^2}\right) \\ & \quad = n\frac{1}{2}\log\left(P\left|\alpha-\alpha^*\right|^{2\nu}\right) + nf_2(P,\alpha), \end{aligned} \tag{106}$$

where f_2 is such that $\lim_{\alpha\to\alpha_0}\lim_{P\to\infty} f_2(P,\alpha)$ exists and is finite. The last equality follows because for every non-zero α_0, the limit $\lim_{\alpha\to\alpha_0}\left\|\begin{pmatrix} v_0 & \cdots & v_L\end{pmatrix}\right\|_2^2$ exists, is finite, and larger than 0, and because by definition α^* is a root of the polynomial $v_{L+1}^2(\alpha)$ with multiplicity 2ν.

Taking $c_0(\alpha) = \lim_{P\to\infty}(f_1(P,\alpha) + f_2(P,\alpha))$ concludes the proof.

REFERENCES

[1] A. D. Wyner, “Shannon-theoretic approach to a Gaussian cellular multiple-access channel,” *IEEE Transactions on Information Theory*, vol. 40, pp. 1713–1727, Nov. 1994.

[2] S. V. Hanly and P. A. Whiting, “Information-theoretic capacity of multi-receiver networks,” *Telecommunication Systems*, vol. 1, pp. 1–42, 1993.

[3] A. Lapidoth, S. Shamai (Shitz), and M. Wigger, “A linear interference network with local side-information,” in *Proceedings of the 2007 IEEE International Symposium on Information Theory (ISIT’07)*, (Nice, France), June 24–29, 2007.

[4] N. Levy and S. Shamai (Shitz), “Clustered local decoding for Wyner-type cellular models,” *Submitted to the IEEE Transactions on Information Theory*, 2008.

[5] S. Shamai (Shitz) and A. D. Wyner, “Information-theoretic considerations for symmetric, cellular, multiple-access fading channels - Parts I & II,” *IEEE Transactions on Information Theory*, vol. 43, pp. 1877–1911, Nov. 1997.

[6] M. A. Maddah-Ali, A. S. Motahari, and A. K. Khandani, “Communication over mimo x channels: interference alignment, decomposition, and performance analysis,” *IEEE Transactions on Information Theory*, vol. 54, pp. 3457–3470, Aug. 2008.

[7] S. A. J. Viveck R. Cadambe, “Interference alignment and degrees of freedom of the k -user interference channel,” *IEEE Transactions on Information Theory*, vol. 54, pp. 3425–3441, Aug. 2008.

[8] A. Lapidoth, S. Shamai (Shitz), and M. Wigger, “On cognitive interference networks,” in *Proceedings of Information Theory Workshop (ITW)*, (Lake Tahoe, USA), Sep. 2–7, 2007.

[9] H. Sato, “The capacity of the Gaussian interference channel under strong interferences,” *IEEE Transactions on Information Theory*, vol. 27, pp. 786–788, Nov. 1981.

[10] G. Kramer, “Outer bounds on the capacity of Gaussian interference channels,” *IEEE Trans. Inform. Theory*, vol. 50, no. 3, pp. 581–586, 2004.

[11] T. M. Cover and J. A. Thomas, *Elements of Information Theory*. John Wiley and Sons, Inc., 1991.

[12] E. Telatar, “Capacity of multi-antenna Gaussian channels,” *European Transactions on Telecommunications*, vol. 10, pp. 585–598, Nov. 1999.

[13] I. Bergel, D. Yellin, and S. Shamai, “Linear precoding bounds for the Wyner cellular channel model with limited cooperation,” in *Proceedings of IEEE 12th International Workshop on Signal Processing Advances in Wireless Communications (SPAWC)*, San Francisco, USA, pp. 206–210, June 2011.

[14] S. A. Jafar, “Interference alignment: A new look at signal dimensions in a communication network,” *Foundation and Trends in Communications and Information Theory*, vol. 7, no. 1, 2011. Now Publishers Inc. Hanover, USA.

[15] S. Shamai (Shitz), O. Somekh, O. Simeone, A. Sanderovich, B. Zaidel, and H. V. Poor, “Cooperative multi-cell networks: impact of limited-capacity backhaul and inter-users links,” in *Proceedings of the Joint Workshop on Communications and Coding (JWCC’07)*, Dürnstein, Austria, Oct.14–16, 2007.

[16] O. Simeone, O. Somekh, H. V. Poor, and S. Shamai(Shitz), “Local base station cooperation via finite-capacity links for the uplink of linear cellular networks,” *IEEE Trans. Inform. Theory*, vol. 55, pp. 190–204, Jan. 2009.

[17] O. Simeone, O. Somekh, G. Kramer, H. V. Poor, and S. Shamai(Shitz), “Throughput of cellular systems with conferencing mobiles and cooperative base stations,” *EURASIP Journal on Wireless Communications and Networking*, vol. 27, 2008.

[18] C. Wang, S. A. Jafar, S. Shamai (Shitz), and M. Wigger, "Interference, Cooperation and Connectivity - A Degrees of Freedom Perspective," in *Proceedings of the 2011 IEEE International Symposium on Information Theory (ISIT’11)*, St.Petersburg, Russia, July 31-August 5 2011.

[19] A. El Gamal, V. S. Annapureddy, and V. V. Veervalli, "On optimal message assignments for interference channel with CoMP transmission," in *Proceedings of the 46th Annual Conference on Information Sciences and Systems*, Princeton, NJ, Mar. 2012.

[20] A. El Gamal, V. S. Annapureddy, and V. V. Veervalli, "Degrees of freedom (DoF) of locally connected interference channels with Coordinated Multi-Point (CoMP) transmission," in *Proceedings of the IEEE International Conference on Communications (ICC)*, Ottawa, Jun. 2012.

[21] A. El Gamal, V. S. Annapureddy, and V. V. Veervalli, "Degrees of Freedom of Interference Channels with CoMP Transmission and Reception", *submitted to IEEE Transactions on Information Theory*, available at `http://arxiv.org/pdf/1109.5396`.